AD-A090 093   NAVAL POSTGRADUATE SCHOOL   MONTEREY CA   F/G 6/7
                A SIMULATION OF COAST GUARD AIR SEARCH AND RESCUE OPERATIONS TO--ETC(U)
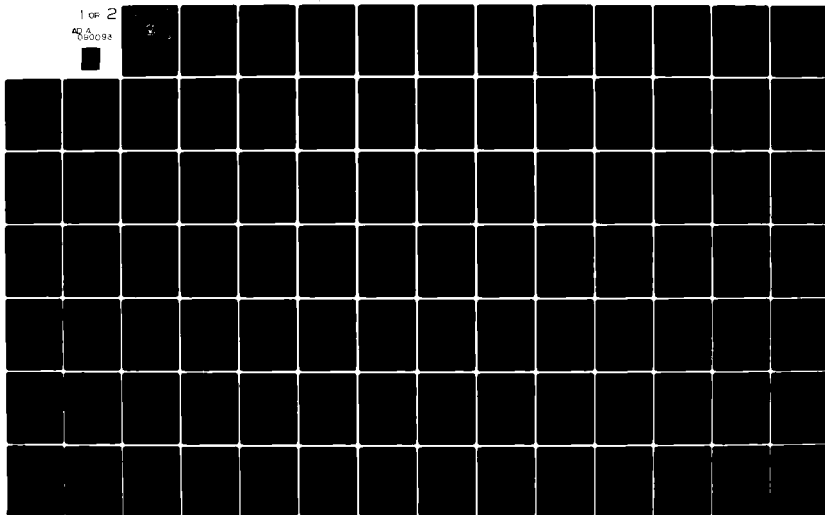   JUN 80   C T LANCASTER

UNCLASSIFIED   NL

1 OF 2

AD A
090093

NAVAL POSTGRADUATE SCHOOL
Monterey, California

THESIS

A SIMULATION OF COAST GUARD AIR SEARCH AND
RESCUE OPERATIONS TO EVALUATE CERTAIN
STATION LOCATION POLICIES AND SCHEMES.

by

Charles Taylor Lancaster

Jun 80

Thesis Advisor: E. F. Roland

REPORT DOCUMENTATION PAGE	READ INSTRUCTIONS BEFORE COMPLETING FORM

1. REPORT NUMBER	2. GOVT ACCESSION NO. AD-A090 693	3. RECIPIENT'S CATALOG NUMBER

4. TITLE (and Subtitle) A Simulation of Coast Guard Air Search and Rescue Operations to Evaluate Certain Station Location Policies and Schemes	5. TYPE OF REPORT & PERIOD COVERED Master's Thesis; June 1980
	6. PERFORMING ORG. REPORT NUMBER

7. AUTHOR(s) Charles Taylor Lancaster	8. CONTRACT OR GRANT NUMBER(s)

9. PERFORMING ORGANIZATION NAME AND ADDRESS Naval Postgraduate School Monterey, California 93940	10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS

11. CONTROLLING OFFICE NAME AND ADDRESS Naval Postgraduate School Monterey, California 93940	12. REPORT DATE June 1980
	13. NUMBER OF PAGES 115

14. MONITORING AGENCY NAME & ADDRESS(if different from Controlling Office) Naval Postgraduate School Monterey, California 93940	15. SECURITY CLASS. (of this report) Unclassified
	15a. DECLASSIFICATION/DOWNGRADING SCHEDULE

16. DISTRIBUTION STATEMENT (of this Report)

Approved for public release; distribution unlimited.

17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)

18. SUPPLEMENTARY NOTES

19. KEY WORDS (Continue on reverse side if necessary and identify by block number)

Coast Guard   HH-52A
Search and Rescue   HH-65A
SIMSCRIPT II.5
Simulation

20. ABSTRACT (Continue on reverse side if necessary and identify by block number)

    This thesis presents a simulation of air operations in the Seventh Coast Guard District which is used to investigate the effect that the relocation of Air Station Savannah will have on the Search and Rescue (SAR) system. Also examined is the probable effect that changes in the aircraft assignment policy will have on the SAR system. Representative annual caseloads, generated by USCG Headquarters for the area under study, were analyzed. The thesis indicates that, under present operating

DD FORM 1473 EDITION OF 1 NOV 68 IS OBSOLETE
1 JAN 73
(Page 1)
S/N 0102-014-6601

conditions, the present location of the air station is
better than any of the others investigated. The simulation
analysis also indicates that by separating one helicopter
from the present station and relocating it elsewhere, a
reduction in average response time and an increase in the
percentage of cases with a response time of less than
45 minutes could be obtained. The incorporation of a new
helicopter, the HH-65A, in the system was also investigated.

Accession For		
NTIS GRA&I	☑	
DTIC TAB	☐	
Unannounced	☐	
Justification		
By		
Distribution/		
Availability Codes		
	Avail and/or	
Dist	Special	
A		

A Simulation of Coast Guard Air Search and
Rescue Operations to Evaluate Certain
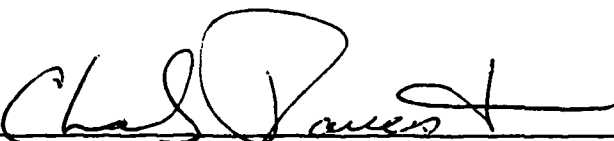Station Location Policies and Schemes

by

Charles Taylor Lancaster
Lieutenant, United States Coast Guard
B.S., United States Coast Guard Academy, 1975

Submitted in partial fulfillment of the
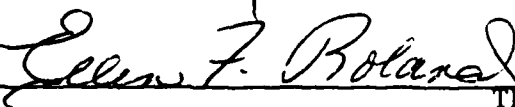requirements for the degree of

MASTER OF SCIENCE IN OPERATIONS RESEARCH

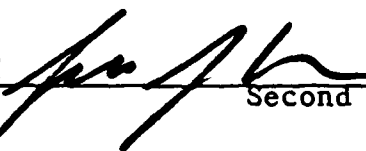from the
NAVAL POSTGRADUATE SCHOOL
June 1980

Author _____

Approved by: _____
                                    Thesis Advisor

_____ GERALD G. BROWN _____
                                    Second Reader

_____ (M. G. SOVEREIGN)
        Chairman, Department of Operations Research

_____
        Dean of Information and Policy Sciences

3

ABSTRACT

This thesis presents a simulation of air operations in
the Seventh Coast Guard District which is used to investigate
the effect that the relocation of Air Station Savannah will
have on the Search and Rescue (SAR) system. Also examined
is the probable effect that changes in the aircraft assign-
ment policy will have on the SAR system. Representative
annual case loads, generated by USCG Headquarters for the
area under study, were analyzed. The thesis indicates that,
under present operating conditions, the present location of
the air station is better than any of the others investigated.
The simulation analysis also indicates that, by separating
one helicopter from the present station and relocating it
elsewhere, a reduction in average response time and an
increase in the percentage of cases with a response time of
less than 45 minutes could be obtained. The incorporation
of a new helicopter, the HH-65A, in the system was also
investigated.

TABLE OF CONTENTS

I. INTRODUCTION

The United States Coast Guard (USCG) as it is known today was created in 1915 with the merger of the Revenue-Cutter Service and the United States Lighthouse and Life-Saving Service. Although a myriad of additional tasks and responsibilities have been transferred to the USCG since then, such as Maritime Inspection, Aids to Navigation, and Marine Environmental Protection, Search and Rescue (SAR) remains as the most visible and best known of the service's missions. This is only proper since a long tradition of outstanding SAR service was inherited by the USCG at the time of the merger with the Life-Saving Service. Today the Coast Guard remains the sole federal agency specifically tasked with the enforcement of marine safety and protection. It utilizes over 1600 small boats and major cutters, 140 aircraft, 200 air and boat stations, and 13,000 men and women to conduct SAR operations.

While this may appear as an extraordinary amount of SAR resources, careful observation shows that this is not the case. There are thousands of miles of coastline and rivers in the United States, along with an uncountable number of multi-jurisdictional lakes which come under the realm of Coast Guard responsibility. These vast areas now generate nearly 75,000 distress cases annually, requiring some 96,000

sorties, during which the Coast Guard is called upon to save some 4000 lives and assist in the recovery of nearly 3.0 billion dollars worth of public property [Ref. 11, pg. ES-6]. The escalating costs of today's fuel, manpower and mechanical resources, coupled with the historical 6% annual increase in SAR requirements, points out dramatically the need for optimum utilization of the above resources if the USCG is to continue to meet the demands for its services.

The Search and Rescue System is, as most policing efforts, reactive in nature. Therefore, this system must be able to move swiftly and efficiently to a distress situation because "time is the most critical element in the saving of lives and property" [Ref. 11, pg. 39].

The purpose of this thesis is to investigate the effect that certain proposed location schemes and policies will have on the response time for the air SAR system in a portion of the Seventh Coast Guard District, in the southeastern United States. At this time, Coast Guard Air Station Savannah serves the air SAR requirements of the South Carolina, Georgia and northeastern Florida area with three HH-52A helicopters. This thesis will develop and present a simulation of the current SAR system, of changes in the location of the air station and of changes in the present aircraft allocation policy of the USCG. Through the use of these simulations an improved scheme, in terms of the average

response time (ART), will be identified. It will also be
shown exactly how the system will be affected by changes
in the present policy of assigning no fewer than three
aircraft to one location. Additionally, the incorporation
of a new helicopter, the HH-65A, into the system will be
investigated.

Chapter II will discuss in detail the problems that the
thesis will deal with, how they originated and their relation-
ship with the overall SAR program. Also included in this
chapter will be a brief description of the present SAR system.
Chapter III will contain a description of the data sets
utilized in this thesis, where they came from and of how
the individual cases contained therein were generated. A
detailed explanation of the air SAR system model developed
for this thesis and the programming assumptions made during
the creation of this model are contained in the fourth
chapter. The fifth chapter contains the data obtained from
the runs of the computer model and an analysis of the effect
upon the modeled SAR system that the location changes and
aircraft scenarios had. Also included will be an analysis
of the present aircraft location requirements, as set forth
in Chapter II, versus the location criteria proposed by the
author. The last chapter contains the conclusions and
recommendations made concerning the proposed changes in
station location and aircraft scenarios

II. PROBLEM STATEMENT AND DEFINITION

Nowhere is there a better example of the well-known law of diminishing returns than in the area of Search and Rescue. Given unlimited resources, both vehicular and human, the Coast Guard would possibly be able to save that last life, of all of those who survived the initial trauma of their calamity. However, the cost and amount of the additional resources needed to rescue this life would be prohibitively expensive. Therefore, SAR Program Standards have been promulgated to address this problem and to set guidelines for the acquisition and distribution of resources. Reference 11 gives a detailed account of all of the assumptions and costing mechanisms which were involved in the development of the present SAR Program Operating Plan.

The particular standard that this thesis is concerned with is the Area Coverage Standard (SAR Goal A.2.b) [Ref. 11, pg. 22, 93]. This standard requires that rescue units be located in such a manner that following the time of departure from their station they arrive on scene or in the search area within 45 minutes, for 90% of all incidents. This time (referred to as the response time for a case in this thesis) is a very important segment of the total case response time, which is defined as the time from the occurrence of an incident to the discovery of the distressed unit by the

resource dispatched. The importance of this measure of
effectiveness stems from the fact that the actual dispatching
of rescue units entails a significant expenditure of Coast
Guard resources. If these departures can continually occur
from stations which are relatively close to a large majority
of the cases, then the response times can be kept as low as
possible.

This will result in a twofold gain for the Coast Guard,
a minimizing of the total resource expenditures for SAR
operations and a reduction in the total time that cases
remain in a distressed situation. This latter reduction is
very important because the longer a person is in a distressed
situation, the greater the chance of death and, conversely,
the sooner the responding unit can arrive at the scene,
the greater the probability that the outcome will be of a
nonsevere nature [Ref. 11, pg. 57].

Presently the USCG has one air station to serve the SAR
cases which require an air resource in the coastal areas of
South Carolina, Georgia, northeastern Florida and the
associated inland rivers and lakes. (See Figure II-1.)
This station, in Savannah, Georgia, has 3 HH-52A helicopters
attached at this time. The HH-52A is an amphibious single-
turbine, short-range helicopter and its major limitation is
a USCG policy which will allow the HH-52A to proceed no more
than 25 miles offshore due to limited engine and navigational
capabilities.

FIGURE II-1

PICTURE OF THE AREA UNDER STUDY
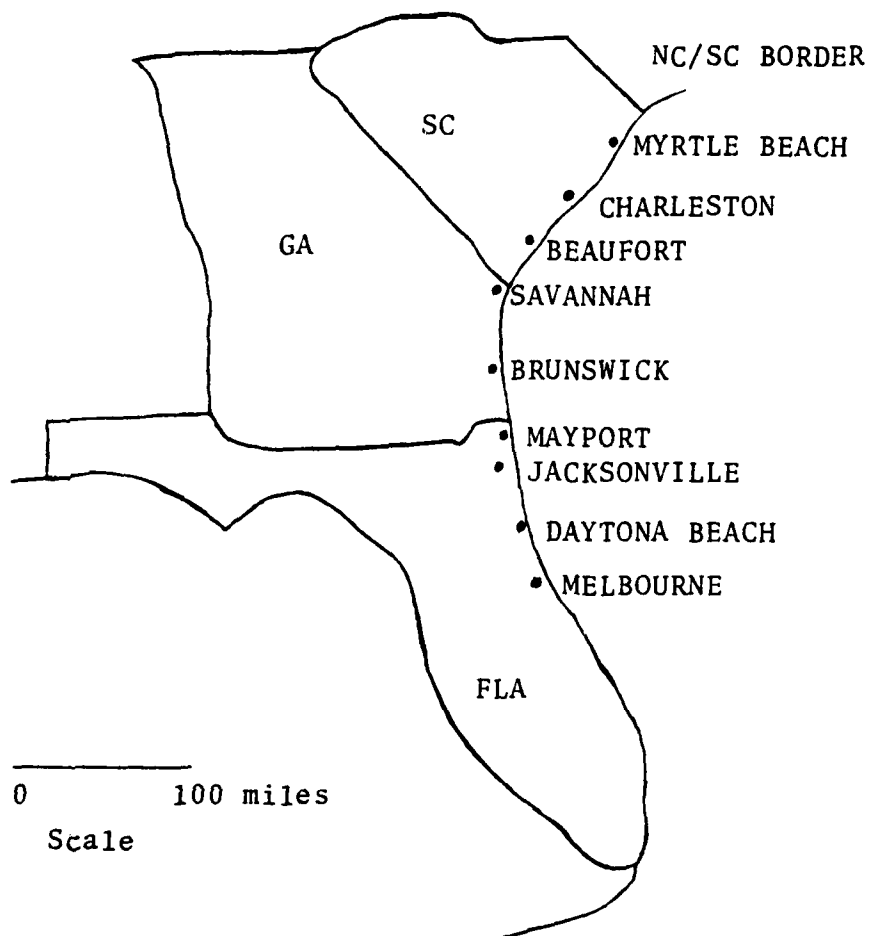
Cases located further than 25 miles offshore are served
by C-130 aircraft and for these cases which require a heli-
copter the C-130 will act as escort for the HH-52A. The C-130
is an all-weather, long-range aircraft, with a flight radius
of 1200 miles along with 2.5 hours of on-scene search time.
Air Station Clearwater, Florida, serves the majority of
these C-130 requirements at this time due to its proximity to
the area and its large number (4) of attached C-130s. On
occasion, assistance is rendered by both Air Station Miami
and Air Station Elizabeth City, North Carolina; however,
for purposes of this thesis it was assumed that Air Station
Clearwater provided all long-range assistance.

At this time the Coast Guard is in the process of pro-
curing a new short-range recovery (SRR) helicopter, the
HH-65A, which will be incorporated into the SAR system,
eventually replacing the HH-52A as the workhorse of the
Aviation Branch of the SAR system. This aircraft will have
a longer range, greater speed, and, of most importance, the
ability to fly as far offshore as its range limitation of
165 nautical miles will allow. This will nearly eliminate
the need for C-130 assistance during short-range SAR
operations.

The Seventh Coast Guard District in Miami has recently
posed a few questions about the location of Air Station
Savannah and its three helicopters and about the future

allocation of the new SRR units. These are:

1. Should the HH-52A units be located at Myrtle Beach, South Carolina, Jacksonville, Florida and/or Cocoa Beach, Florida?

2. Would one SRR unit provide adequate coverage for northeastern Florida and Georgia when located in or near Daytona Beach, Florida?

3. Would the present air station be more useful if it were relocated to Charleston, South Carolina, and if so would this obviate the need for an SRR unit in northeastern Florida?

These questions [Ref. 10, pg. II-16] motivate the geographic coverage question, where does the Coast Guard locate the resources that are available?

It has long been Coast Guard policy that no fewer than three aircraft will be assigned to any SAR air station. The rationale behind this policy has been that, since aircraft are also used for training, logistical support and in other mission areas, any other assignment criteria would place such a burden upon a station that the SAR mission requirements could not be adequately satisfied. This rationale is based on the "not operationally ready" (NOR) rates associated with the particular type of aircraft being studied, which are combined with the number of aircraft assigned to the unit to give probabilities of at least one aircraft being immediately available to respond to an incident. (See Table II-1.) For example, presently Air Station Savannah has three HH-52As assigned and they have an

TABLE II-1

PROBABILITY AT LEAST ONE AIRCRAFT AVAILABLE

Number of Aircraft Assigned	NOR RATE (%)				
	30	25	20	15	10
1	.7000	.7500	.8000	.8500	.9000
2	.9336	.9543	.9709	.9800	.9928
3	.9868	.9925	.9962	.9981	.9995

approximate NOR rate of 20%, so the probability that at

least one HH-52A is ready to launch is 0.9962. The new

SRR helicopter has an estimated NOR rate of 15% at this

time [Ref. 10, pg. II-6].

After examining Table II-1, it becomes apparent that

the helicopters assigned to a station are not independent

entities. If this were the case, then the probability of

an HH-52A being available for use, at Air Station Savannah,

would be 0.992 instead of 0.9962. This additional utiliza-

tion or dependency among aircraft is nearly impossible to

quantify, though it is felt that most of the dependency comes

from the ability of maintenance personnel to cannibalize one

aircraft to obtain parts which might not normally be readily

available as spares.

However, this table, developed by USCG Headquarters for

use as a management tool, has been based on many years of

observation of air operations and is used extensively by the

Coast Guard for aircraft resource planning. For the purposes

of this thesis, the NOR rates, as assigned by USCG

Headquarters, and the table of probabilities were assumed

to be correct. Greater detail concerning NOR rates,

Table II-1, and their derivation can be found in Reference 10.

This response criteria problem was investigated at the

request of the USCG Headquarters. It was approached by

investigating alternatives to the present policy of three

aircraft to a station, such as single-unit stations spread out along the coast, and the impact that the NOR rates and associated probabilities from Table II-1 would have on these new location schemes.

It seemed obvious at first glance that spreading the aircraft units out along the coastline would reduce the total flight time and average response time to all cases. But would these decreases be worth the expected increase in the number of cases which would have to wait for assistance and cases where no response could be made by air resources?

The purpose of this thesis was to provide an analysis of these two problems and to make any recommendations which appear useful in answering them. Specifically, this thesis was to indicate where a good location of the assigned aircraft would be, under the present policy, looking not only at the previously discussed sites but also at all possible coastal airport sites. It was assumed that only three helicopters would be assigned to this area at any time, so the problem of how to best incorporate the new SRR units and delete the old HH-52As was to be addressed.

The SAR system for any area remains basically the same, in that discrete, random events (cases) occur and, depending on event characteristics, require service from either one or more types of rescue units. A simulation of the system was decided upon in lieu of a strictly analytical model, for these reasons:

1. There were two types of cases, search and
    non-search, each with separate service
    requirement distributions.

2. There were the three types of aircraft.

3. There exists the possibility of cases
    having to be deferred while waiting for
    an available aircraft.

4. There was a need for distributional data
    collection in order to compare various
    schemes.

5. It is able to best address the questions
    posed earlier as to aircraft assignment
    locations and the impact on SAR readiness
    of any splitting up of the available
    aircraft.

The model developed herein serves the above purposes

only and is not to be construed as an attempt to augment the

SARSIM model of Refs. 9, 12, 13, 14, and 15. The latter

model, developed by the National Bureau of Standards and

the USCG, is a theoretical model of the whole search and

rescue mission area. A large, very time consuming model, it

is capable of simulating completely the SAR operations for

any area, under any scenario the user may wish to investi-

gate. However, due to its complexity and associated run

times, pilot studies such as this thesis are required to

obtain an initial overview of this problem or scenario to

see if there does exist evidence that further, more detailed

investigation can be suitably justified.

18

III. DATA COLLECTION

Seven years of data were utilized by this thesis. The
year which was labeled as one was the actual set of cases
for the area of interest for FY-1979. These included all
of the cases responded to by Air Station Savannah during
this period. The remaining six years (labeled Year Two
through Year Seven) were generated by USCG Headquarters,
utilizing their SAR Data Base, for use in this thesis.

The Coast Guard has invested a large amount of money and
time in this data base and it is considered to be very
accurate in its ability to create a typical case load for
an area of interest. Prior to this investment, a large
amount of calculations and raw data collection was necessary
to generate a typical set of cases for an area [Ref. 2].
Now USCG Headquarters' SAR Office maintains this data system
and it is now "the primary means of collecting and storing
information relative to all Coast Guard SAR operations.
This system is essential in order to have a true picture
of the demands placed upon the Coast Guard by SAR operations
and to project these demands in terms of planning for future
requirements" [Ref. 8, pg. 1-I-1].

The remaining portion of this chapter describes the
manner in which the data base is maintained and how the data
system actually used the data base to generate the data for
this thesis.

Coast Guard Regulations require the preparation, by the responding station, of a SAR Assistance Report, CG-5151, for every case opened by that unit. Refer to Appendix A for an example of this form. These reports easily allow the quantification of all of the attributes of a case for storage in the SAR Data System. Reference 8 fully documents the preparation of the Assistance Reports and the importance to the Data Base that they have.

Any device which is used to extract information from the SAR Data Base and then to create a set of cases has to be highly accurate in its portrayal of the area's demands. To obtain this accuracy, the device used by the Coast Guard is the Search and Rescue Simulation (SARSIM) model, a part of which creates case files which are consistent and representative for an area of interest. Complete documentation and validation of the SARSIM model and this process is contained in Refs. 9, 14 and 15.

Basically what occurs is that the information extracted from the SAR Data Base is used to determine the distributions of the attributes for a typical case of an area. These distributions are then used to create cases which are compatible with the area under study, based on this historical data base. These cases are then classified in one of four ways: (1) Peak Time, Search, (2) Peak Time, Non-search, (3) Off-peak Time, Search, and (4) Off-peak Time, Non-search.

These case files are then utilized by the Originate Events Member (OEM) of SARSIM to draw a representative sample of the total caseload for the area under study. This "selection process preserves the underlying distributions of case characteristics" [Ref. 15, pg. 1].

Thus, a representative case load for a typical year, based on the historical data base for the area, could be created. Direct programmer alteration of the various "underlying distributions" can be accomplished to create various case load scenarios for atypical years when changes are expected to occur in the area. The case loads generated for this thesis were assumed to be representative of the area under study, subject to the following criteria:

1. Only cases which required an aircraft to launch were included.

2. The area of study was determined to extend south from the North Carolina/South Carolina border to Melbourne, Florida, both 100 miles inland and 500 miles offshore. This area was chosen since the NC/SC border marks the northern limit of the area of SAR responsibility for the Seventh Coast Guard District and the southern limit is the approximate northern limit for flight operations out of Air Station Miami.

3. A 6% annual growth rate in the case load was used for each succeeding year. This annual inflation of the total case load has remained rather constant for the Coast Guard since the mid-1960s and for planning purposes it has been assumed that it will continue at this rate in the foreseeable future [Ref. 11, pg. 41].

4. Due to the time constraints of this thesis
   and problems encountered by USCG Headquarters
   in generating acceptable case loads, only
   one case load sample for each simulated
   year was used.

IV. MODEL DEVELOPMENT

A. INTRODUCTION

"A simulation is a technique for conducting an experiment on a computer involving the use of a certain type of mathematical and logical model that describes the behavior of some type of system over a period of time" [Ref. 4, pg. 4]. The system portrayed in this thesis included the following basic events:

1. A case, either search or non-search, with a set of attributes occurs.

2. The type of air resource required to serve this case is identified.

These basic events were modeled by the program event routines, ENIGMA (search case) and NOSRCH (non-search case).

The next basic steps taken were:

3. The closest available aircraft of the proper type was identified and launched.

4. After proceeding via the required flight path to the area of distress or search, the aircraft remained at the scene long enough to completely satisfy the requirements of the case.

5. If the system could not respond due to all of the available aircraft being utilized, then service for the case was deferred until an aircraft became available.

These steps were modeled by the event routine LAUNCH. Then the next steps taken were:

6. When a case has been completed or aborted, then the aircraft returns back to its station.

7. Upon returning, the queue or set of cases which service for has been deferred, is checked and, if it is non-empty, then a launch is planned for the next case.

These steps were modeled by the event routine RETURN.TO.BASE.

The following sections of this chapter will discuss in detail the events just described, the remaining administrative program routines and an explanation of all mathematical and logical assumptions which were made. A slight knowledge of the SIMSCRIPT II.5 programming language will be assumed by the author in order to keep from having to go to great lengths in the explanation of certain terms that are a part of that language. Reference 3 can be utilized by the reader to obtain any detailed knowledge of the language.

B. THE PREAMBLE ROUTINE

The PREAMBLE routine was utilized to allocate storage for the events and entities and their attributes. Every air station location used in a run was modeled as a permanent entity with a location, name and various types and numbers of aircraft attached. Each air station was also assigned a set or queue which was to be used for storing cases until a helicopter was available for service. The entity CASE was used to store the attributes of each case for as long as they were needed, after which they would be destroyed.

Also included in the routine were the specifications for the statistical gathering routines. These included the

calculation of the mean and variance of the set of response times for all of the cases responded to, a histogram of these response times and the total number of cases for which a launch was made and not aborted. The number of cases responded to, a histogram of the aircraft utilizations, the number of queued cases and their waiting times, and the number of times the air station failed to launch an air resource were calculated for each air station used in the run.

C. THE MAIN ROUTINE

The MAIN routine initialized which air station/aircraft configuration would be investigated, for example, 3 HH-52As at one location, 2 HH-52As at one site and 1 HH-65A at another or possibly 3 HH-52As, each at separate locations. A completely empty, completely idle SAR system was initialized at the start of each run since an air station is not performing SAR operations for over 90% of the time.

D. THE ENIGMA AND NOSRCH EVENT ROUTINES

An event, ENIGMA for a search case or NOSRCH for a non-search case, was scheduled for each case at its system arrival time. Initially each routine read in the attributes of each case, assigned the case a number and transferred all of these attributes to a temporary entity CASE. Then it was the function of these routines to decide if the case

25

was reachable by a lone helicopter, or if only a C-130 was
to be utilized, or if a helicopter would be needed, using
the C-130 for navigational assistance. When the proper
aircraft was decided upon, a LAUNCH was scheduled if needed.
If the location of the case was outside of the maximum range
of the helicopters in use, then a C-130 from Clearwater would
serve the case completely.

The logic of handling the assignment of aircraft types
and LAUNCH scheduling by these routines is best explained by
considering each possible scenario separately.

Scenario 1: HH-52As only in use: If the case was
greater than 25 miles offshore and the services of a helicopter
were required; i.e., a medical evacuation, personnel rescue,
then a LAUNCH was scheduled for the time when the C-130 was
on scene to vector the HH-52A to the area. If the services
of a helicopter were not needed, then a C-130 served the case
and no LAUNCH was scheduled. For those cases located less
than 25 miles offshore, a LAUNCH was scheduled immediately.

Scenario 2: HH-65As only in use: As long as the case
was no further offshore than the maximum range of the aircraft,
then a LAUNCH would be scheduled immediately. Those cases
outside this range were served by C-130s.

Scenario 3: HH-52As and HH-65As both in use: If the
case was located further than 25 miles offshore, then a
LAUNCH would be scheduled immediately with a HH-65A as the

servicing unit. For those cases closer than 25 miles offshore, an immediate LAUNCH was scheduled but with no aircraft type specified. Then, when the closest air station to the case was determined by the LAUNCH routine, the type of aircraft which was available there would be utilized. However, if that station was unable to launch or to provide an air resource, then only the HH-65A aircraft were utilized thereafter due to the distances from one air station to another and their enhanced flight capabilities which made them the better choice.

Both of these routines performed these functions for their particular case set, but the ENIGMA routine also had to read in the total search miles for the case and account for their effect on the scheduling of the case's associated LAUNCH.

E. THE LAUNCH EVENT ROUTINE

Whenever the system was required to launch an air resource to assist or aid in the assistance of a case, the event routine LAUNCH was utilized. Using the location of the case which was associated with this launch, the routine would determine which air station was located closest to the case. These calculations were performed using Euclidian, rather than great circle, distance. Due to the relatively small distances involved and the ease in coding, efficiency is enhanced at little cost in approximation error by this choice.

Once the closest air station had been determined, it was
then determined whether that air station could actually
respond to the case. If all of that station's assigned
aircraft were busy on other cases, then the case entered the
queue if it was non-severe. For severe cases, since there
existed a threat of loss of life, the next closest air station
was determined. If the closest station had aircraft on the
ground but none were operationally ready for SAR operations
(see Chapter II) then it was assumed that the situation would
not change in the foreseeable future and that all cases were
referred to the next closest air station for service. Should
the routine run out of air stations while attempting to launch
and the case was not queued, then the case was noted as
being unanswered by the system and eliminated from further
consideration.

Once the closest available aircraft was located, it
was assumed to have been dispatched and to have headed toward
the incident location or search area via the flight path
determined by the aircraft type and which of the following
situations was in use:

Situation 1: HH-52A assisting a case inside of 25
miles offshore: Due to the flight limitations of the HH-52A,
it was forced to travel along the coastline until the case
was oriented directly seaward; then the aircraft would turn
and fly directly to the case. The geographic configuration

of the coastline was depicted as shown in Figure IV-1. Any HH-52A stationed below Savannah would fly directly up along the coast, then turn right, again following the coastline. Those stationed northward would come down the opposite way. If the case was located less than 25 miles from the station, the aircraft was allowed to fly directly to the case. Also, cutting the corner at the point where the coastline turns, as shown by the dotted line in Figure IV-1, was not allowed.

Situation 2: HH-52A assisting on a case outside 25 miles offshore: Since a C-130 would already be on scene, it was assumed to be available for navigational assistance. Then the helicopter was dispatched to fly directly to the case if the location was inside the helicopter's range. For cases located outside direct flight range, the coastline flight pattern described in Situation 1 was utilized to allow the unit to refuel.

Situation 3: HH-65As serving any case: As a result of the heightened flight capabilities of this aircraft, it was able to fly directly to all cases unless this distance violated its maximum range limitation. When this violation occurred, the HH-65A was forced to follow the coastal contour flight path described in Situation 1.

While the routine LAUNCH is calculating the proper distances, it is also accounting for the miles flown or
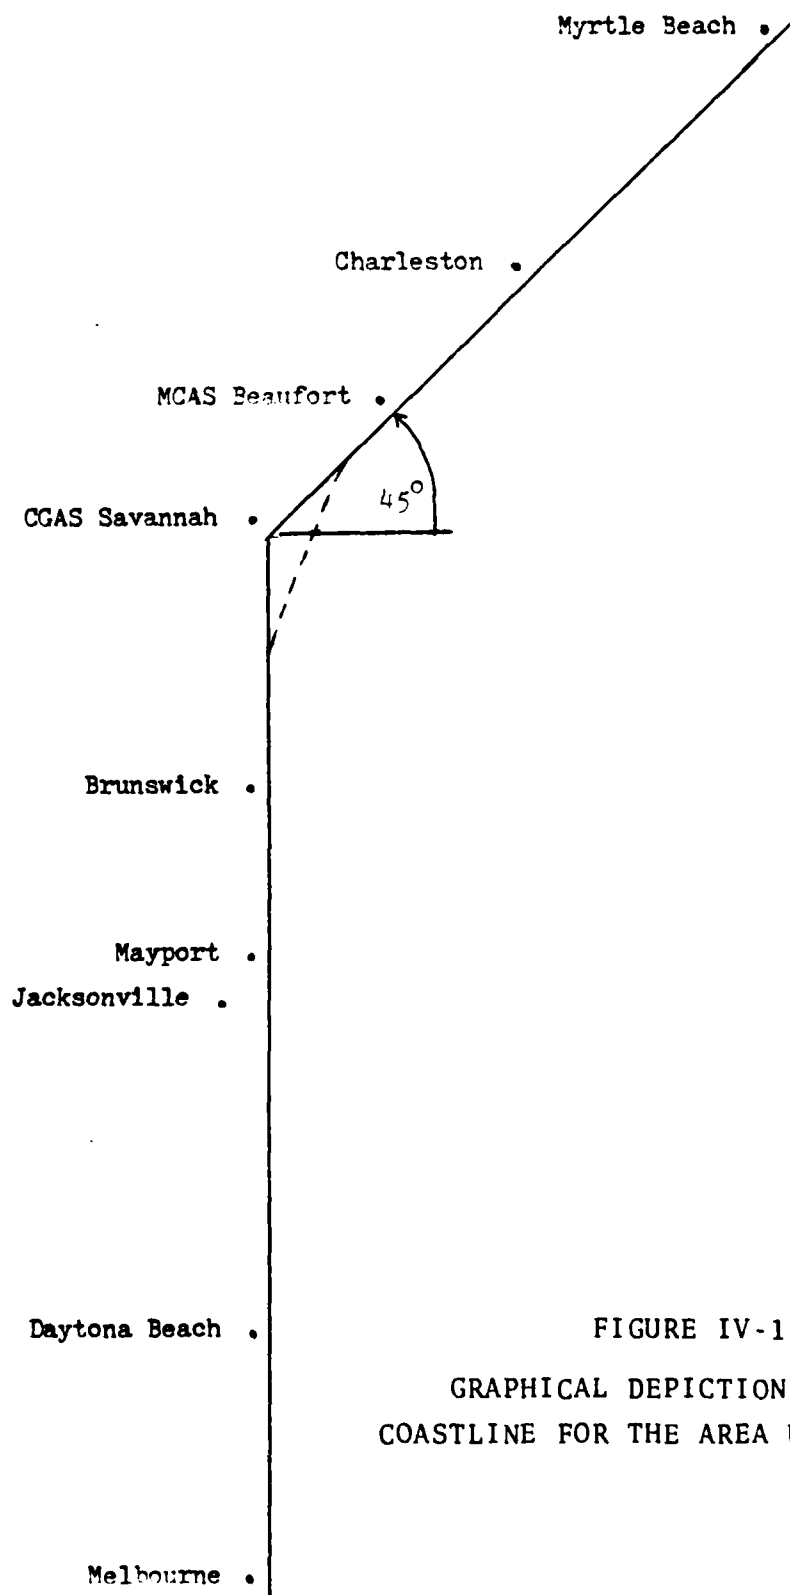
Myrtle Beach •

Charleston •

MCAS Beaufort •

CGAS Savannah •   45°

Brunswick •

Mayport •
Jacksonville •

Daytona Beach •

Melbourne •

FIGURE IV-1

GRAPHICAL DEPICTION OF THE
COASTLINE FOR THE AREA UNDER STUDY

30

to be flown. Therefore, if the straight-line distances warranted, or if the distance along the coast and thence out to and back from the case was beyond the range of the aircraft, then a refueling stop time of one hour was added to the flight time [Ref. 2, pg. 58]. It was assumed that locations with the refueling facilities for a helicopter were readily available anywhere along the coast.

All distance calculations for flights along the coastline, as depicted in Figure IV-1, were performed by the function routine DISTANCE.TO.CASE.

Certain simplifying assumptions were made about cases and system operations during the programming of the routine LAUNCH to keep the model from becoming intractable. *These were:*

1. An aircraft on a case would not be diverted to another, possibly more severe, case which might have arisen.

2. The locations of all of the cases were assumed to remain constant.

3. The speeds of advance, 90 knots for a HH-52A, 140 knots for a HH-65A and 300 knots (150 knots while searching) for a C-130, were assumed to be correct and to remain constant throughout the case.

4. Once generated, the attributes of a case remained invariant throughout the case.

5. Due to the fact that for all seven years of data only ten cases occurred during periods when the visibility was less than one quarter mile, it was assumed that there were no aircraft delays in launching due to inclement weather.

F. THE RETURN.TO.BASE EVENT ROUTINE

This event routine would be scheduled to occur after an
aircraft had flown out to the case location, satisfied all
of the demands of the case and then returned to the air
station. At this point, it was assumed that the aircraft
would return along the same route that it traveled out on.
Upon its return to base, the station's "queue" was checked
for deferred cases and if there were any the first one was
removed and scheduled for assistance in one hour. This
delay is required for refueling and crew changing. If no
cases were queued, then control was passed to the timing
routine.

G. THE STOP.SIM EVENT ROUTINE

This event routine was purely administrative in nature.
Occurring at the end of each simulated year, it printed out
all of the data accumulated during the course of the run.

See Appendix B for a complete listing of the model
program.

V. ANALYSIS OF THE SIMULATION
DATA AND RECOMMENDATIONS

A. EXPERIMENTAL DESIGN

This thesis deals with two separate problems, that of relocating the air station to the best available location under present policy and the impact on the SAR system that changes in the present aircraft allocation policy will have. The experimental design and analysis for each problem were slightly different, as were the issues. Therefore, the plan for each experiment, the issues being questioned and how the analysis was carried out are all described for each problem in that problem's section introduction.

B. LOCATION OF AIR STATION SAVANNAH UTILIZING CURRENT USCG POLICY

1. Introduction

Policy now in effect requires that all three helicopters in the system be stationed together at a single base. To investigate just where this station should be located, the following design was utilized.

1. An initial run, in which all three helicopters in the system were assigned to each possible air station site, was performed.

2. The FY-1979 case load was utilized for every location, using the same random number seed so that the variance reduction technique of correlated samples was implemented for each run.

3. Those locations which, based upon the initial results, appeared to be impractical were eliminated from further investigation. These locations were chosen arbitrarily by the author in order to keep the total number of runs made as low as possible. Since a run for each year's case load used from 55 to 75 seconds of computer CPU time, six additional runs for a location which appeared to be a very poor alternative were avoided.

4. For those locations which appeared to be viable alternatives, subsequent runs utilizing all six years' case loads were made and the results reported.

By utilizing this design, it was shown where the best location of the three helicopters would be for each system.

2. The 3 HH-52A System

The results of the initial run for this system are given in Table V-1 where ART = average response time for a case; SDRT = standard deviation of the set of response times for a year; % < 45 = percentage of that year's cases with response times less than 45 minutes; and % > 120 = percentage of that year's cases with response times greater than 120 minutes.

The values given in Table V-1 and all subsequent tables are for one run only. Replications of one scenario were done only for Savannah (10 replications) and then Charleston and Mayport (3 replications each). The ranges between the high and low values obtained were 2 minutes for ART, 1.5 minutes for SDRT and 1% for the two percentages

34

TABLE V-1

3 HH-52As in One Location, Initial Run

Location	ART	SDRT	% < 45	% > 120
Myrtle Bch	119.89	79.67	4.6	24.6
Charleston	74.88	62.36	26.2	17.7
MCAS Beau.	56.62	50.00	61.5	17.7
Savannah	48.38	45.48	60.0	12.3
Brunswick	52.66	28.41	47.7	3.1
Mayport	66.19	21.83	12.3	0.7
NAS Jacksv	69.29	22.67	13.8	1.5
Daytona Bh	92.18	43.40	18.5	23.1
Melbourne	120.22	62.50	16.2	64.6

reported. These small ranges result from the low stochastic nature of this simulation. So when very large values were obtained, such as those for Myrtle Beach or Daytona Beach, the author would not consider that location any further.

It is obvious that this process is not supported by any statistical theory and could be a source of criticism. However, some way had to be decided upon to keep the number of runs to a reasonable level and, even with the use of this process, over 200 runs were still required, using over three hours of CPU time. The final reasoning behind this method of location reduction was that the location of an air station at a site where there was a possibility of getting unacceptable values, such as the ones obtained, would probably not be a viable alternative to the decision maker.

Location of air stations at Myrtle Beach, Beaufort, Daytona Beach or Melbourne was given no more consideration due to excessively large values of ART, SDRT or case percentages when compared to Savannah. Location at Jacksonville was eliminated in favor of Mayport since they are located close together but Jacksonville is an area of high air traffic density while Mayport has very little traffic and is located very close to the shoreline. Jacksonville was included on the remaining initial runs though to ensure that no large gains in system efficiency would be overlooked.

Location of an air station at Brunswick received further consideration, but only one run for each year's case

load was performed. This was done since Brunswick is located very close to Savannah and it appeared that the move of a complete air station over that small a distance probably could not be justified.

Location of an air station at Charleston, which appeared to be a poor proposition, was given a complete analysis anyway since it is to here that the Seventh Coast Guard District has proposed to relocate Air Station Savannah.

Location at Mayport received a complete analysis due to its distribution of initial run response times which was very dense about the mean and, as a result, it had only one case with a response time greater than 120 minutes. Of course, in opposition to this figure, there were fewer cases with response times less than 45 minutes.

Air Station Savannah was given a complete analysis so as to have a basis for comparison for the alternative locations. The figures obtained from the complete analysis, utilizing seven years of cases and three replications for each year, are given in Appendix D.

Observation of the data indicated an increase in total system case load from 139 to 178 cases, attributable to a 6% annual increase in case load, with no marked increasing trend in the average response time of the system. Also, there were very few cases, six, that had to be queued while waiting for service. Since the preceding points remained true no

matter which location was used, it seems reasonable to assume that this system should remain stable in the near future under present Coast Guard policy. Therefore, any perturbations in the system will have to be judged by their effects upon the ART of the system and by their degree of compliance with the applicable SAR Program guidelines, as promulgated by USCG Headquarters.

The sample data obtained showed that the range of response times for the present system, for all seven years, is from 38.6 to 50.87 minutes, with an overall average of 45.8 minutes. Relocating Air Station Savannah to Charleston had the effect of increasing the range of response times to 69.31 - 80.42 minutes, with an overall range of 75.48. This move also increased the SDRT from an overall value of 44.88 minutes to one of 60.69 minutes. The percentage of cases with a response time of less than 45 minutes was reduced from an average of 64% to 24.2% for each year. The move also increased the percentage of cases with times greater than 120 minutes from an average of 11.6% to 17.0% per year. Therefore, a relocation to Charleston is not recommended.

The other locations studied, Brunswick and Mayport, appear to be much better locations than Charleston but not so much so that a shift from Savannah could be recommended. Mayport did have a very low percentage of cases with times greater than 120 minutes, less than 1.5% for every year

except one. However, this advantage was offset by its low percentage (15.3%) of cases with a response time of less than 45 minutes, which caused it to have an overall ART of 64.78 minutes.

The Brunswick location appeared to be the most promising, if a relocation was to take place. Brunswick had a comparable overall response time of 50.55 minutes, with a SDRT of 28.43 which was much lower than Savannah's 44.88. However, the situation here is similar to the one just described for Mayport in that Brunswick had very few cases with response times larger than 120 minutes (4.1% overall) but its slower response to the remainder of the case load results in a larger ART and an overall weaker performance than Savannah.

In conclusion, as long as the Coast Guard is going to maintain its current SAR air rescue allocation policy, in that no fewer than three aircraft will be assigned to any one location, no relocation of the air station servicing this portion of the Seventh Coast Guard District is recommended.

3. The Incorporation of the HH-65A into the System

Incorporation of new HH-65A aircraft in the system under present allocation policy is superficially a trivial problem. The oldest, or most unreliable, of the remaining HH-52As would be replaced by the new incoming craft and the

station would remain where it was before, still with three helicopters assigned.

However, the possibility exists that the new aircraft's increased capabilities could result in an alteration of the system's response attributes which could indicate that a move of the station could now be justified.

To investigate this possible situation, an initial run, similar to the one performed for the "3 HH-52A system," was executed for the 2 HH-52A/1 HH-65A system. The results for the run, which are tabulated in Table V-2, are remarkably similar to those obtained for the 3 HH-52A system previously discussed. The major difference is that nearly every table value has increased, but in such a way that the ordering precedence has been preserved. By ordering precedence, it is meant that Savannah's ART is lower than Beaufort's, which is lower than Charleston's, and so on. This increase for the ART and SDRT occurs even though the new aircraft is more capable because of the additional 12-19 cases served yearly by a 140-knot, short-range helicopter, which were previously serviced by a C-130, a 300-knot, long-range aircraft. These cases are located further offshore than the other cases, thereby causing the overall increase in the ART and in the SDRT.

It was felt that surely, as more of the newer aircraft are integrated into the system, the response times

TABLE V-2

2 HH-52As and 1 HH-65A in One Location, Initial Run

Location	ART	SDRT	% < 45	% > 120
Myrtle Bch	129.54	106.26	6.1	25.4
Charleston	82.06	97.71	29.2	20.0
MCAS Beau.	63.73	92.01	64.6	18.5
Savannah	55.07	91.24	61.5	13.8
Brunswick	58.56	82.55	50.7	3.8
Mayport	73.30	79.14	13.8	1.5
NAS Jacks.	76.84	79.00	13.8	1.5
Daytona	100.80	84.99	18.5	23.1
Melbourne	131.90	92.49	16.2	68.5

41

would again decrease to their original levels or less.
Therefore, the final configuration of 3 HH-65As comprising
the system aircraft was simulated, utilizing the same condi-
tions as used on the previous runs, and these results are
compiled in Table V-3.

As expected, all of the table values were found at
their lowest levels except for the percentages of cases
with a response time of less than 45 minutes, which were
at their highest.

In conclusion, since all of the numerical orderings
remained basically the same as those investigated in Section
B.2 of this chapter, no relocation of the system's air station
is recommended when the incorporation of the new aircraft
into the SAR system begins.

C. REDEFINITION OF THE CURRENT COAST GUARD AIRCRAFT ALLOCATION POLICY AND ITS IMPACT ON THE SAR SYSTEM

1. Introduction

This section of the thesis dealt with the influence
that changes in the current policy of assigning no fewer
than three aircraft to any one station would have upon the
SAR system.

It was hypothesized that, given a limit of only
three aircraft in the system, much lower response times could
be obtained by spreading these resources out along the coast
and dispatching the closest available unit to all distress

42

TABLE V-3

3 HH-65As in One Location, Initial Run

Location	ART	SDRT	% < 45	% > 120
Myrtle Bch	84.53	85.85	14.6	21.5
Charleston	55.78	85.84	67.7	10.0
Beaufort	44.79	85.80	73.8	1.5
Savannah	40.39	84.71	74.6	1.5
Brunswick	43.67	80.17	66.2	0.8
Mayport	52.61	78.22	55.4	0.8
NAS Jacks.	55.69	78.01	37.7	0.8
Daytona	72.83	78.76	20.0	1.5

43

situations. The type of system envisioned here is one which

would be analogous to the type of arrangement currently

utilized by the various Coast Guard Groups. These units

are allotted a certain number of boats and personnel which

are in turn distributed among the stations of the Group which

are located throughout the Group's area of responsibility.

Reference 10, during its discussion of the NOR

rates and their use, details a few of the objections to a

policy of this type, but no quantitative support is presented.

Therefore, it may be possible to show that, even though a

few additional cases may be queued or forced to go without

an air resource (thereby having to be served by slower

surface craft), the benefits to be reaped in terms of

reduced total flight time and time that situations remain

in a distressed status may very well overcome previously

held misgivings concerning this type of policy.

At an early stage, it became quite evident that

due simply to the sheer number of possibilities there was

no way to investigate all of the acceptable combinations of

air station locations and numbers of assigned aircraft.

Therefore, with the use of the results obtained in Section B

of this chapter, some simplifying assumptions were made in

order to make the number of possible scenarios more tractable.

They were:

    1. Due to the facilities presently available
        and the fact that it was shown to be the

most desirable location, there would always
be at least one aircraft located in Savannah.

2. When there were two aircraft assigned
together, they would be located in Savannah.

3. When the integration into the system of the
HH-65A was investigated, only one helicopter
was considered since the projected delivery
date of subsequent aircraft (mid-1980's) to
the system postdates the available data base
by such a margin as to render any results
obsolete.

4. Due to the fact that even when the new heli-
copter is assigned to the system with two
HH-52As, the two groups remain independent
of each other in regards to their operational
readiness probabilities, it was assumed that
the two HH-52As would remain together and
the HH-65A would be separated. Assumption 4
appeared reasonable because of the maintenance
savings which would be made by having to sup-
port only two, in lieu of three, maintenance/
spare parts operations for the system.

By utilizing these assumptions, in conjunction with
an experimental plan similar to that described in Section B.1
of this chapter, it was shown what the impact on the SAR
system would be by the adoption of this type of allocation
policy.

2. The 3 HH-52A System

The first configuration investigated was that of
removing one HH-52A from Savannah and relocating it at various
other locations in the area. As was done in previous trials,
an initial run was performed to reduce the number of possible
locations. The results of this run, which utilized the data
generated for the first year, are given in Table V-4.

45

TABLE V-4

Initial Run Data

2 HH-52As in Savannah and 1 HH-52A in Various Other Locations

Location	ART	SDRT	% < 45	% > 120	# Queued
Charleston	37.79	37.89	65.9	6.8	1
MCAS Beau.	38.49	37.91	68.7	6.8	1
Brunswick	31.23	29.84	74.6	3.8	1
Mayport	31.23	25.62	73.3	1.5	0
Daytona	31.66	27.96	73.3	1.5	0
Melbourne	36.87	31.77	69.8	4.2	0

46

Location of the separated helicopter at either
Charleston, Beaufort or Melbourne was not given any further
consideration. This was due to their excessively large
ART and SDRT values and their smaller percentages of cases
with response times less than 45 minutes, when compared to
the remaining locations. Since these other three locations,
Brunswick, Mayport and Daytona Beach, all exhibited an initial
decrease of nearly 20% in the ART for the system and an
increase from 68% to over 73% in the percentage of cases
with a response time of less than 45 minutes, they were
chosen for further study. The results of the complete
analysis performed for the three locations are compiled in
Appendix E.

Of the three locations studied, Daytona Beach was
clearly superior. Its ART was consistently lower and it had
the smallest statistical range, with an overall average
of 34.04 minutes versus 36.16 for the Mayport and 38.02 for
Brunswick. The percentage of time Savannah had at least
one helicopter available for services other than SAR remained
rather constant at approximately 99.85% for all three loca-
tions, while the percentage of time the lone HH-52A was away
was the lowest for Daytona Beach (1.5% versus 1.9% and 2.1%
for Mayport and Brunswick, respectively). Daytona also had
the highest overall percentage of cases with response times
lower than 45 minutes, 71.6%, more than 4% better than

47

either of the others and its worst year's value of 66.5%
compared very favorably to the 60.1% and 61.5% obtained for
the other two. In the area of cases queued, Daytona was
once again the best alternative with a total of 10 cases
queued versus 15 and 16 cases for the others, over all seven
years. It was in this area that Daytona's only drawback
was observed, in that the cases queued, while fewer in number,
had a longer average waiting time than those in the other
two queues. So if a scenario such as this one, two stations
and three HH-52As, is to be utilized, then the recommended
configuration under Assumption 2 is to have a dual-helicopter
station in Savannah and a single-unit station in Daytona
Beach.

Now the pertinent question to be addressed is:
What will the gains be, in terms of increased efficiency
in SAR system operations, for the USCG? By comparing the
data compiled in Appendix E for the Daytona system to that
listed in Appendix D for the present system, it was found
that:

1. Each year's ART was decreased by this new
    scheme, with a minimum decrease of 7.5
    minutes (19%) for Year 2, to a maximum
    decrease of 14.8 minutes (31%) for Year 5,
    with an overall average decrease of 11.6
    minutes (25%). In addition to reducing
    the probability of a case having a critical
    outcome, these lower ARTs also translate into
    an approximate reduction of 29 hours of
    system flight time per year.

2. Each year's percentage of cases with low
    response times increased, with a minimum

48

increase of 5% for Year 2, to a maximum of 11% for Year 5, with an overall increase of 8%, or from 63.5% to 71.6%.

3. The percentage of time that Air Station Savannah had a helicopter available for non-SAR use remained well over 99% for both situations, while Daytona's percentage was better than 98% for every year except Year 7, which had a value of 97.9%.

4. The two-air-station configuration had a larger number of cases which had to be queued, 10, than did the present system which had only one. This was expected since, when a non-severe case occurs and the closest available air station does not have an air resource available at that time which will occur more frequently during this scenario, then the case is queued until the return of a helicopter.

So by adopting a system of this type, the Coast Guard can obtain a reduction in the amount of total flight time for this area and in the ART for a case located in this area. This adoption will increase the number of cases with low response times and still maintain an available helicopter for over 98% of the time, at both air stations. To see if even greater increases in system efficiency could be obtained by splitting up all three helicopters and placing them all in separate locations, an additional run was performed, subject to the assumptions made earlier in this chapter, utilizing the same data as before, for ten location schemes. The pairs of locations used, in addition to Savannah, and the results obtained are tabulated in Table V-5. As can be seen, the ARTs are all higher than those obtained in the

49

TABLE V-5

Initial Run Data

1 HH-52A in Savannah and 1 HH-52A in Each of

Two Other Different Locations

Location Pair:	ART	SDRT	% < 45	% > 120
Beau/Brun	41.17	41.34	76.5	10.6
Beau/Mayport	41.11	38.84	69.7	8.3
Beau/Char	48.60	53.99	66.6	15.2
Beau/Daytona	39.56	40.09	72.7	9.8
Brun/Char	42.40	45.32	66.6	10.6
Brun/Mayport	40.04	31.83	58.3	2.3
Brun/Daytona	37.90	33.32	62.9	3.8
Char/Mayport	42.32	40.00	58.3	6.1
Char/Daytona	42.33	44.58	64.4	9.8
Mayport/Daytona	40.68	31.16	53.6	3.0

preceding system (Table V-4) and the percentages of cases with response times less than 45 minutes were all lower than those of the previous system. In fact, these values are for the most part worse than those which were obtained for the present system, and this type of location scheme was not investigated any further in this thesis.

Initially these results were perplexing because it seemed intuitive that the ARTs would decrease with such a spread of air resources. Closer scrutiny showed what was occurring was that with three single-unit stations many cases, particularly the higher severity ones, which were located very close to one air station were forced to obtain service from other stations, which were increasingly further away. This was due directly to the relatively low probabilities of a single helicopter being available for SAR operations that every station now had. Therefore, this search for an available server pushed up the ART to the levels indicated, making this scenario a very poor alternative to even the present system.

3. The 2 HH-52A/1 HH-65A System

In recognition of Assumptions 3 and 4, of Section C.1 of this chapter, when this system was investigated, only the scenario which had two HH-52As located in Savannah and the new helicopter located in various other places was investigated. So for comparison purposes, it was first required

that a complete analysis for this system be performed which had all three helicopters located in Savannah. The results of this analysis are tabulated in Appendix F.

Then an initial run was made, utilizing the FY-79 case load of Air Station Savannah (Year 1). The results of this run are compiled in Table V-6. Here again, as in the previous section, the possible relocation sites decided upon were Brunswick, Mayport and Daytona Beach, due to their overall superiority to the remaining locations. The results obtained from the complete analysis of the three locations selected are presented in Appendix G.

Among the locations studied, no clearly better alternative could be identified. All three systems seem to operate in such a manner that all of their ARTs, SDRTs and case percentages remained very close to each other. The ARTs for each year were always very close, differing only by 2.5 minutes or less for every year except 2 and 3, which had a total difference of six minutes each. As for the overall ART, it ranged from 38.03 for Mayport, to 38.3 for Brunswick, to 39.12 for Daytona Beach. The percentage of time Savannah had at least one helicopter available was 99.5% for every year and location, while the same percentage for the HH-65A remained above 97.0% for every year, with an overall average of 97.4% for Brunswick and Mayport and 97.9% for Daytona Beach. Daytona also came out slightly ahead in regards to

52

TABLE V-6

Initial Run Data

2 HH-52As in Savannah and 1 HH-65A in Various Other Locations

Location:	ART	SDRT	% < 45	% > 120
Charleston	49.96	90.75	75.2	15.5
Beaufort	49.81	91.00	74.4	14.7
Brunswick	41.48	83.82	67.4	4.6
Mayport	41.31	81.89	66.6	2.3
Daytona	40.69	82.69	73.6	2.3
Melbourne	45.82	85.55	67.4	5.4

the values obtained for the percentage of cases with response

times less than 45 minutes. It had a minimum value of 70.5%,

a maximum of 80.7%, with an overall average of 75.1%, while

Brunswick had a minimum of 65.1%, a maximum of 79.3% and an

overall of 71.5%, and Mayport had a minimum of 66.6%, a

maximum of 78.6%, with an overall average of 72.7%. The

percentages of cases with response times greater than 120

minutes were very close, remaining at approximately 3% for

all seven years, at all locations.

As for the number of cases queued, it was again

very close, with Brunswick having seven cases queued and

Daytona and Mayport having nine and 12 cases queued,

respectively. Additionally, there did not appear to be any

major differences in the total waiting time for the cases

among the three locations.

Selecting a location for this system for an initial

relocation would require additional study in areas such as

available facilities at certain locations or in possible

changes in the attributes of the projected case load for this

system's region of responsibility. However, if a relocation

had already been accomplished, such as the one recommended

in Section C.2 of this chapter, then the separated HH-52A

could easily be replaced by the new HH-65A, for a more

efficient system.

By comparing the data in Appendix G to that tabulated

in Appendix F, an indication of just how much more efficient

this proposed system would be to the present one can be
obtained.   Through this comparison, it could be seen that:

1. The overall ART for the system would decrease
    by 13-14 minutes, approximately 24%, with
    similar decreases in each year's ART.

2. The percentage of cases with response times
    less than 45 minutes would increase from a
    yearly average of 66.27 to at least 71.5%
    and possibly even 75.1%.

3. The percentage of cases with response times
    greater than 120 minutes would decrease from
    a yearly average of over 13% to one of
    approximately 3%.

4. Every air station location, no matter what
    the scenario, would have at least one heli-
    copter available for use in mission areas other
    than SAR for over 97% of the year.

The Coast Guard can probably obtain large increases
in the numbers of cases with small response times, decreases
in the ART for a case during a year, decreases in total
yearly flight time and a decrease in the percentages of cases
with response times greater than 120 minutes by adopting the
type of allocation policy and system proposed in Section C.1
of this chapter.   These increases are also obtained without
seeming to place an unusual burden upon any air station's
ability to meet its other mission area demands since an
aircraft is available for use over 97% of the time through-
out the year.

VI. CONCLUSIONS

If the Coast Guard continues to adhere to its present
aircraft allocation policy of three units to a station,
then it has been shown that the present system is acceptable
in terms of average response times and total flight time. It
was also shown that the present system is acceptable in that
it came the closest of any of the simulated air station
locations to complying with SAR Program Goals, as promulgated
by Ref. 11. Any relocation of the three-helicopter station,
such as to Charleston, South Carolina, is not recommended
since this resulted in a degraded system and would entail the
expense of relocating an entire station.

All of the results obtained in the second portion of this
thesis are presented as information for the decision maker.
This information indicates that changes in the present policy
of three aircraft to a station can result in better performance
standards for the station's area of responsibility.

In particular, for Air Station Savannah, it was shown that,
by relocating one helicopter, an improved system was attain-
able. However, when the units were separated into three
single-unit stations along the coast, the inability of the
stations to make consistent responses to a majority of their
cases resulted in an overall degraded system.

APPENDIX A
COAST GUARD ASSISTANCE REPORT (CG-5151)

SEARCH AND RESCUE ASSISTANCE REPORT

APPENDIX B

COMPUTER PROGRAM

A SIMULATION OF THE COAST AIR SAR TRAFFIC
TO INVESTIGATE OPTIMUM LOCATION
FOR A.C.'S WITH RESPECT TO AIR STATION
LOCATIONS.

AT AIR STATIONS ARE USED FOR THIS RUN.
LOCATIONS AND LOGISTICS ARE AS FOLLOWS:

FOR EVERY AIR.STATION, DO THE FOLLOWING.
PRINT A LINE WITH NAME(AIR.STATION),
AS.LAT(AIR.STATION)*57.29577,AS.LONG(AIR.STATION)*57.29577, THUS
NUM.MED(AIR.STATION)

AIR.STATION *******
LATITUDE: =
LONGITUDE: =
... MED AIRCRAFT ARE ATTACHED.

LOOP
SCHEDULE A STOP.SIM AT 365.0
... = NUM.SIM
START SIMULATION
END

... = A SEARCH CASE......

```
LET AUX2(CASE) = SACAP2(ENIGMA)
LET UACR2(CASE) = SUCR2(ENIGMA)
LET UACR3(CASE) = SENCR3(ENIGMA)
LET TYPE(CASE) = AUXTR.3(ENIGMA)

'' THESE EVENT ATTRIBUTES ARE STORED IN THE TEMPORARY ENTITY CASE SO THAT
'' THEY CAN BE TRANSFERRED TO THE EVENT LAUNCH, IF NEEDED.

'' NOW CHECK FOR MAXIMUM RANGE VIOLATIONS.

IF SCDS(ENIGMA) GT MER.RANGE        AND MF.FLAG EQ 1, GO TO 98
ELSE
   IF MR.FLAG EQ 1 AND MF.FLAG EQ 1
      IF FCS(CASE) GE 2
         GO TO 1
      ELSE
         LET AC.TYPE(CASE) = 2
         SCHEDULE A LAUNCH GIVEN CASE NOW
         PRINT LINE WITH X.NUM THUS

'' LAUNCH FOR CASE ****, A RESEARCH CASE, WILL BE SCHEDULED NOW.

ELSE

IF SCDS(ENIGMA) GT 25.1 AND MR.FLAG EQ 0
   PRINT 4 LINE S WITH X.NUM,SCDS(ENIGMA) THUS

'' THIS IS A SEARCH CASE, CASE NUMBER ****, LOCATED ****.** MILES OFF
'' THE COAST. MERAC ARE NOT AVAILABLE SO A C-130 FROM AIR STATION
'' CLEARWATER WILL BE CALLED.

   LET X.DT2R = ((((1.4472378 - SR.LAT(ENIGMA))*57.29577)*60.)
   LET X.DT2R = ((((1.443.666 - SR.LNG(ENIGMA))*57.29577)*52.)
   LET X.DT2R = ARS*F(ILT.KNTS)
   LET X.OUTT = ((XILT.UP**2.) + (ILT.KNTS**2.)**.5
   LET MIL.AC = X.OUT/300.)
   LET HRS.OUT = TIM TSCA(ENIGMA)/150.)
   LET HRS.OUT = HRS.CUT + SRCH.HRS
   ...
   LET ... = C.C

'' GO TO 98   IF AN HH52A WILL BE NEEDED WHEN THE OBJECTS ARE FOUND.
```

```
      IF  SACM1(SIGMA) LE  HR.SCH"
          IF(SDOS(SIGMA) GT HH.RANGE        , GO TO 97
          IF AC.TYPE(CASE) = 130
          SCHEDULE A LAUNCH GIVEN CASE IN TOT.HRS HOURS
          GO TO 99
      ELSE PRINT 2 LINES WITH X.NUM THUS

      " DISTRESS CASE *** WILL BE SERVICED COMPLETELY BY A C-130."
          GO TO 99
  "1"  ELSE  IF  Y.FLAG .GE. 1 "  THE CASE WILL BE SERVICED BY A MRRAC, IF AVAILABLE"
          PRINT 3 LINES WITH X.NUM AND SDOS(SIGMA) THUS

   CASE *** LOCATED ***.** MILES OFFSHORE IS A SEARCH CASE AND MRRAC
   WILL BE UTILIZED, IF AVAILABLE. THE LAUNCH IS NOW BEING SCHEDULED.
          IF AC.TYPE(CASE) = 1
          SCHEDULE A LAUNCH GIVEN CASE NOW
          GO TO 99

      ELSE IF  SLOS(SIGMA) LT 25.0 AND MR.FLAG EQ 0
          IF AC.TYPE(CASE) = C
          SCHEDULE A LAUNCH GIVEN CASE NOW
          PRINT 2 LINES WITH X.NUM THUS

      " LAUNCH FOR CASE ****, A SEARCH CASE, WILL BE SCHEDULED IMMEDIATELY."
          GO TO 99
      ELSE PRINT 1 LINE WITH X.NUM THUS
      " ************* WELL FOOL, A MISTAKE HAS BEEN MADE WITH SEARCH CASE ***. ***********"
          GO TO 99
  "7"  PRINT 2 LINES WITH X.NUM AND SDOS(SIGMA) THUS

      " CASE *** IS LOCATED ***.** MILES OFF THE COAST, OUT OF THE RANGE
        OF THE C-130, THE EVACUATION WILL HAVE TO BE EFFECTED BY A SHIP."
          GO TO 99

  "8"  PRINT 3 LINES WITH X.NUM AND SDOS(SIGMA) THUS

   CASE *** IS LOCATED ***.** MILES OFFSHORE, OUT OF THE EFFECTIVE
   RANGE OF A C-130 HAS TO BE USED.
      LAT.RNG.SD = ((.4872278 - SR.LAT(SIGMA))*57.29577)*60. )
```

63

```
IF OUT.KATS = ((1.443C566 - 54.LNG(SNIGMA))*57.29577)*52.0
LL KATS.UP = AFS.F(KATS.UP)
LLL OUT.KATS = AFS.F(OUT.KATS)
LLLL MILEAGE = (KATS.UP**2. + OUT.KATS**2.)**.5
LLLL AFS.OUT = MILEAGE/300.0
LL DESTROY CAS.TIME = AFS.OUT
```

' VERT ACSRCH '' A NCRSEARCH CASE ......

ADD 1 TO ...
REAL ...(NOSRCH), NATNCS(NOSRCH), NVIS(NOSRCH), NSEVINCSPCH),
...

'' THE VERT ATTRIBUTES HAVE BEEN READ INTO CASE, A TEMPORARY ENTITY CREATED TO
'' TRANSFER THE ATTRIBUTES TO THE LAUNCH. IF NR.D=H.

'' NUM OF FFX MAXIMUM RANGE VIOLATIONS.
   IF NR(NOSRCH) GT ARS.RANG   AND NR.FLAG 'Q 1, GO TO 98

'' IF NR.FLAG 'Q 1 AND H.FLAG 'C 1
   IF AFS(CAS.) 'Q 1
   ...

64

```
LET AC.TYPE(CASE) = 2
SCHEDULE A LAUNCH GIVEN CASE NOW
PRINT 2 LINES WITH X.NUM THUS

IF NODS(ACSRCH) GT 25.0 AND MR.FLAG .EQ.0
GO TO 90
IF NODS(ACSRCH)= ... WITH X.NUM,NODS(NOSRCH) THUS

THIS IS A NONSEARCH CASE. CASE NUMBER ****, LOCATED ****** MILES
OPERATE A ... NOT AVAILABLE SO A C-130 FROM AIR STATION
CLEARWATER WILL BE CALLED.
LET KNTS.UP=((1.48723376-NLAT(NOSRCH))*57.295771)*60.0
LET NLNG=((1.443965-NLONG(ACSRCH))*57.295771)*52.)
LET CUT.KNTS = ABS.F(CUT.KNTS)
LET CUT.KOP = ABS.F(CUT.KNTS)
LET MKATS = (KNTS.UP**2. + CUT.KNTS**2.)**.5
LET MILLAG = MILLAC/310.)
LET RESP.OUT = CASE.) = 0.0
LET SR.RESPONSE.TIME = HRS.OUT

... GO TO 95, IF AN NHSDA WILL BE ADDED WHEN THE C-13) IS CASCENE.

''   IF NNCH(NOSPCH) EG NR SCN
''   AN NHSDA WILL BE NEEDED WHEN THE C-130 IS CASCENE
''   IF NODS(ACSRCH) GT HH.RANGE , GO TO 97
          LET AC.TYPE(CASE) = 130
          SCHEDULE A LAUNCH GIVEN CASE IN HRS.OUT HOURS
          GO TO 95
ELSE
PRINT 2 LINES WITH X.NUM THUS

CASE **** WILL BE SERVICED COMPLETELY BY A C-130.
DESTROY CASE
GO TO 90

''   IF MR.FLAG ''O 1 ** THE CASE WILL BE SERVICED BY A MEDAC, IF AVAILABLE
''   PRINT 3 LINES WITH X.NUM AND X.NUM AND NODS(NOSRCH) THUS
''   **** WILL LOCATED ****.** MILES OFFSHORE IS A NONSEARCH CASE AND
          A MEDAC IS AVAILABLE. IF AVAILABLE. LAUNCH NOW BEING SCHEDULED.
          LET AC.TYPE(CASE) = 1
          SCHEDULE A LAUNCH GIVEN CASE NOW
          GO TO ...
```

65

```
.. ELSE
    IF HDDS(NDSSCHD).LT.ZE-0 AND MD.FLAG.EQ.0
      SCHED.TYP(CASE)=0      ... A LAUNCH GIVEN CASE 'JIM
      PRINT 2 LINES WITH X.NUM THUS

.. ELSE
.. LAUNCH FOR CASE **** A NEW SEARCH CASE, WILL BE SCHEDULED IMMEDIATELY.
      SCHED.TYP(CASE) =
      GO TO SG

.. PRINT 1 LINE WITH X.NUM THUS
**** YOU FOOL, A MISTAKE HAS BEEN MADE WITH A NDSEARCH CASE ****. $$$$$$$$$
      GO TO SG
..
.670 PRINT 3 LINES WITH X.NUM AND HDDS(NDSRCH) THUS

CASE **** IS LOCATED ***.** MILES OFF THE COAST, OUT OF THE RANGE
OF THE HELO. THE EVACUATION WILL HAVE TO EFFECTED BY A SHIP.
      DESTROY.CASE
      GO TO SG
..
.740 PRINT 3 LINES WITH X.NUM AND HDDS(NDSRCH) THUS

CASE **** IS LOCATED ***.** MILES OFFSHORE, OUT OF THE EFFECTIVE
RANGE OF A HELO.  SO C =180  HAS TO BE USED.
      LLT.KAT.UP = ((0.4872378 - SQ.LAT(ENIGMA))*57.29577)*60.0
      LLT.KAT.UP = ((1.4430966 - SQ.LNG(ENIGMA))*57.29577)*52.0)
      LLT.KNTS = ABS.F(KNTS.UP)
      LLT.KNTS = ABS.F(CUT.*KNTS)
      LLT.RGE = (KNTS.UP**2 + CUT.KNTS**2.)**.5
      LLT.RGE = MILF/(C/2.0)
      DESTROY.CASE.TIME = HRS.CUT
      DESTROY.CASE
..
.DDS.    IS      THE SYSTEM ...

.. VIT LAUNCH GIVEN THIS.CASE"

.. PRINT THIS.CASE AS AN INTEGER VARIABLE
   IF CASE = THIS.CASE
.. THIS DEFINES THE SYSTEM PGM HAS TO LAUNCH A HELO, EITHER TO SERVICE THE
```

66

::: CASE COMPLETELY ON TO ASSIST A C-130 IN THE CASE.
::: COMPUT THE CLOSEST AVAILABLE AIR STATION.

```
        LET STAR = 0.AIR.STATION
        LET CLOSEST.AS = INFCC
'2'     LET DIST.FM.AS = 10CCC.CC
        FOR EVERY AIR.STATION, CC THE FOLLOWING
        LET STAR = STAR, GO TO 9P
        LES = THE AIR STATIONS AVAILABLE
        IF NAME(AIR.STATION) EQ CLOSEST.AS OR STATUS(AIR.STATION)
        = 0, GO TO 1

        ELSE
        LET KNOTS.UP = ((CAS.LAT(AIR.STATION)-LAT(CASE))*57.29577)*60.
        LET CUT.KTS = ((CAS.LONG(AIR.STATION)-LONG(CASE))*57.29577)*

        LET KNOTS.UP = ABS.F(KNOTS.UP)
        LET CUT.KTS = ABS.F(CUT.KTS)
        LET MILEAGE = (((KNOTS.UP)**2. + (CUT.KTS)**2.)**.5
        IF DIST.FM.AS = MILEAGE
        LET DIST.FM.AS = MILEAGE
        LET CLOSEST.AS = NAME(AIR.STATION)
        ALWAYS
```

'1' LOGE

    IF WE HAVE THE CLOSEST AVAILABLE AIR STATION TO THIS CASE.
    PRINT OUT THIS DATA.

```
    WRITE LINE WITH CASE.NUM(CASE), LAT(CASE), DIST.FM.AS THUS
    LONG(CAS)*57.3, CLOSEST.AS, DIST.FM.AS THUS
```

    CASE NUMBER **** AT **.**° AND **.**° REQUIRES A LAUNCH ???.
    AIR STATION ******** IS **.** KNOTS AWAY AND
    WILL BE CALL TO LEFT TO LAUNCH.

::::: DETERM IF THIS AIR STATION WILL BE ABLE TO RESPOND WITH AN AIR
::::: CRAFT. THE PROBABILITY IS ASSOCIATED WITH THE NUMBER OF AIRCRAFT
::::: AS WITH THE CASE WERE EXTRACTED FROM THE AVIATION PLAN, FY 1981-1980, AND
::::: USE WITH THE STANDARD U.S. UNIFORM RANDOM NUMBER GENERATOR.

::: CK TO SEE WHAT TYPE OF AIRCRAFT IS GOING TO BE USED.

```
    IF AC.TYPE(CAS) = 0 1, GO TO 9
'19' IF EACH AIR.STATION WITH NUM(AIR.STATION) EQ CLOSEST.AS, DO
     IF NUM.AH(FIT.STATION) EQ 1, GO TO 18
     ELSE
```

67

```
LET PROB.AC.OR = UNIFORM.F(0.0,1.0,SEED)
IF ACM.HH(AIR.STATION) EQ 1 AND PROB.AC.OR GT 0.8
    GO TO 4
ELSE IF ACM.HH(AIR.STATION) EQ 2 AND PROB.AC.OR GT 0.9709
    GO TO 4
ELSE IF ACM.HH(AIR.STATION) EQ 3 AND PROB.AC.OR GT 0.9962
    GO TO 4
ALSO
    GO TO 5
'4' LOOP
    PRINT 4 LINES WITH CLOSEST.AS THUS,
        THE CLOSEST AIR STATION, ***, WAS UNABLE TO LAUNCH AN HH52A.
        THE NEXT CLOSEST AIR STATION WITH H-H52AS WILL BE NOTIFIED.

'12' FOR EACH AIR.STATION WITH NAME(AIR.STATION) EQ CLOSEST.AS, DO
    LET STATUS(AIR.STATION) = 0
    SUBTRACT 1 FROM STAR
    LET AC.TYPE(CASE).HC.0
    OLD 1 TO AC.NR.LAUNCH(AIR.STATION)
    OTHERWISE
    ALWAYS
    GO TO 2

'13' LOOP
    IF AC.TYPE(CASE) EQ 2
        IF STAT EQ 1 THE CLOSEST.AS AND CASE.NUM(CASE) THUS
        HH52A S AVAILABLE FOR LAUNCH SO THE MRBAC ATTACHED
    LET AFSTA **** FOR CASE ****
    GO TO 5

    PRINT 6 LINES WITH CLOSEST.AS, CASE.NUM(CASE) THUS
        THIS CASE, ****, HAS NO HH52AS TO LAUNCH.
        CLOSEST AIR STATION WILL BE NOTIFIED IF IT HAS A SEVERITY.
        CLOSEST AIR STATION HAS HH52AS ATTACHED. THE NEXT
        IF AC.HH52AS ARE ATTACHED IF THE SEVERITY IS 1 OR

'1' FOR EACH AIR.STATION WITH NAME(AIR.STATION) EQ CLOSEST.AS, DO
    IF S.NUM(CASE) FOR AC.AT.STATUS(AIR.STATION) EQ 1
        GO TO 13
    ALSO LET TIN = TA.COMP(CASE) = TIME.V
    FILE CASE IN AC.CUMUE(AIR.STATION)

'14'
```

68

```
'13'  GO TO 55
      FOR EACH AIR.STATION WITH NUM(AIR.STATION) EQ CLOSEST.AS, DO
         MFRAC.MFR(AIR.STATION) EQ 0, GO TO 14
      LET PROB.AC.OR = UNIFORM.F(0.0,1.0,SEED)
      IF NUM.MFR(AIR.STATION) EQ 1 AND PROB.AC.OR GT 0.85
         GO TO 15
      ELSE IF NUM.MFR(AIR.STATION) EQ 2 AND PROB.AC.OR GT 0.93
         GO TO 15
      ELSE IF NUM.MFR(AIR.STATION) EQ 3 AND PROB.AC.OR GT 0.998
         GO TO 15
      ELSE
         GO TO 5
      LOOP
'14'  PRINT 5 LINES WITH CLOSEST.AS, CASE.NUM(CASE) THUS

      THE CLOSEST AIR STATION, ****, HAS NO MFRAC TO LAUNCH.  CASE
      *** WILL BE QUEUED IF IT HAS A SEVERITY CODE OF 0 AND
      IF STATION HAS MFRAC ATTACHED.  IF THE SEVERITY CODE IS 1 OR IF
      NO MFRAC ARE ATTACHED THEN THE NEXT CLOSEST AIR STATION WILL BE CALLED.

      FOR EACH AIR.STATION WITH NUM(AIR.STATION) EQ CLOSEST.AS, DO
         IF SEV(CASE) EQ 1 OR AC.ATT.STATUS(AIR.STATION) EQ 0
            GO TO 12
         ELSE
            LET TIME.IN.QUEUE(CASE) = TIME.V
            FILE CASE IN AS.QUEUE(AIR.STATION)
      LOOP
      GO TO 5
'15'  PRINT 3 LINES WITH CLOSEST.AS THUS

      THE CLOSEST AIR STATION, ****, WAS UNABLE TO LAUNCH A MFRAC.
      THE NEXT CLOSEST AIR STATION WITH MFRAC WILL BE NOTIFIED.

      GO TO 12
::
::    AT THIS POINT AN AIRCRAFT OF SOME SORT IS AVAILABLE FOR TAKEOFF.
'16' IF AC.TYPE(CASE) EQ 1, GO TO 16 '' FOR MFRAC CALCULATIONS
     ELSE IF AC.TYPE(CASE) = 150, GO TO 8
     ELSE IF TYPE(CASE) = 2, GO TO 6 '' FOR SEARCHING CALCULATIONS
     '' '' WE HAVE A MFRAC SEARCH CASE.
```

69

```
IF DOS(CASE) LE 25.0 AND DIST.FM.AS GT 22.0
IF ACFT(CAS-) = MARATCH... 
   LET TTIME = SPR.1(CASE)+SPR.2(CASE)+SPR.3(CASE)
   LET REFUEL = FUNC.F(DISTANCE.TO.CASE + DOS(CASE))/3+...
       LET RESPEAC.TIME = DISTANCE.TO.CAS-/HH.SPEED + REFUEL
   SCHEDULE A RETURN.TO.BASE GIVEN CLOSEST.AS AND AC.TYPE(CAS-)
       IN ((RESPEAC.TIME*2.0)+TIME) HOURS
   GO TO 7
   ELSE
   PRINT 3 LINES WITH CASE.NUM(CASE) THUS

CASE **** WAS ABORTED.

ADD 1 TO ABORTED.CASES
SCHEDULE A RETURN.TO.BASE GIVEN CLOSEST.AS AND AC.TYPE(CAS-)
   IN (SPR.1(CASE) HOURS
GO TO 7

'ELSE'
IF DIST.FM.AS LE 22.0
   LET RESUL = SPR.1(CASE)+SPR.2(CASE)+SPR.3(CASE)
   LET RESPEAC.TIME = DIST.FM.AS/HH.SPEED
   SCHEDULE A RETURN.TO.BASE GIVEN CLOSEST.AS AND AC.TYPE(CAS-)
       IN ((RESPEAC.TIME*2.0)+TIME) HOURS
   GO TO 7

...

''' ARRIVE AT THIS POINT THE DOS MUST BE GT 25 MILES AND THE SERVICE
''' AIRBASE ABOVE. I.E. RES.V.
''' 
''' LET TIME = SPR.1(CASE)
   IF DIST.FM.AS GT HH.RANGE
       PRINT 1 LINE OF THUS
   ''' LET GO TO BASE AND OVER-RANGE ?????
   ''' LET DISTANCE.TIME = ((DISTANCE.TO.CASE + DOS(CASE))/3)+...
'''' ''' ''''
   ''' LET A.FUEL = ...
   ''' LET RESPEAC.TIME = DIST.FM.AS/HH.SPEED
   ALWAYS
   SCHEDULE A RETURN.TO.BASE GIVEN CLOSEST.AS AND AC.TYPE(CAS-) IN
       ((TRANSIT.TIME*2.0) + TIME) HOURS
   GO TO

''' WE HAVE A SEARCH CASE.
''' 
''' IF DOS(CAS-) LE 25.0 AND DIST.FM.AS GT 22.0
```

```
IF AC.NO(CASE) AT "ABRT"
    LET R.FUEL = SCH.1(CASE)+SER.2(CASE)+SER.3(CASE)
    LET R.RESPONSE = TRUE.F((DISTANCE.TO.CASE + DOG(CASE))/300.)
    SCHEDULE A RETURN.TO.BASE GIVEN CLOSEST.AS AND
        (AC.TYPE(CASE)) IN
        ((RESPONSE.TIME*2.)+TIME+(TISEM(CASE)/(HH.SPEED*4.)))
        HOURS
    GO TO 7

ELSE
    PRINT 3 LINES WITH CASE.NUM(CASE)    THUS

CASE **** WAS ABORTED.

ADD 1 TO ABORTED.CASES
SCHEDULE A RETURN.TO.BASE GIVEN CLOSEST.AS AND
    (AC.TYPE(CASE)) IN SER.1(CASE) HOURS
GO TO 7

ELSE
IF DIST.FM.AS LE 22.0
    LET.TIME = SCR.1(CASE)+SER.2(CASE)+SER.3(CASE)
    RESPONSE.TIME = ((DIST.FM.AS)/HH.SPEED)
    SCHEDULE A RETURN.TO.BASE GIVEN CLOSEST.AS AND AC.TYPE(CASE)
        IN ((RESPONSE.TIME*2. + (TISEM(CASE)/(HH.SPEED*4.))+TIME))
        HOURS
    GO TO 7
    '' DOG IS GREATER THAN 25 MILS AND A HELO WILL BE NEEDED,
    '' THE SEARCH WAS PERFORMED BY A C-130.
GO TO 7

'' SET ALL ATR STATION STATUS VALUES BACK TO 1.
''7' FOR EVERY ATR.STATION, DO
    LET STATUS(ATR.STATION) = 1
FOR EVERY ATR.STATION WITH NAME(AIR.STATION) NO CLOSEST.AS, DO
    SUBTRACT 1. FROM VAL.N(THE(AIR.STATION)
    ADD 1 TO CASE.COUNT(AIR.STATION)
LOOP
'' ''
'' POST AND ABC CALCULATIONS.
'' ''
''10'  IF AC.NO(CASE) NE HABITU
    IF DIST.FM.AS GT SER.1(CASE) + SER.2(CASE) + SER.3(CASE)
        THIS.FM.AS OF SHOR.SEARCH
        PRODUCT OLD UP AND OUT.    *****
'' ''
''   THE SEARCH GED UP AND OUT
```

71

```
IF   LET DIST.FM.AS = DISTANCE.TO.CASE
IF DIST.FM.AS + 2*DIST(CASE).GE.MFR.RANGE
    ALS LET REFUEL=TRUNC.F((DIST.FM.AS + 2.*DIST(CASE))/4.0.)
    ALS LET REFUEL = 0
    ALWAYS
OTHERWISE LET RESPONSE.TIME = DIST.FM.AS/MFR.SPEED + REFUEL
OTHERWISE LET RESPONSE.TIME = DIST.FM.AS/MFR.SPEED
    ALWAYS
IF AC.TYPE(CASE) = 2
    LET LST.TIME) = TIM + TSEM(CASE)/(MFR.SPEED*4.)
    ALWAYS
SCHEDULE A RETURN.TO.BASE GIVEN CLOSEST.AS AND AC.TYPE(CASE)
    IN ((RESPONSE.TIME*2.0) + TIME) HOURS
GO TO 18

ALSO PRINT 2 LINES WITH CASE.NUM(CASE) THUS

'16'  LET AC.ABORTED.CASES
    ADD 1 TO ABORTED.CASES
    SCHEDULE A RETURN.TO.BASE GIVEN CLOSEST.AS AND AC.TYPE(CASE)
        IN ((RESPONSE.TIME*2.0) HOURS
    LET STATUS(AIR.STATION) = 1

'18'  FOR EVERY AIR.STATION WITH NAME(AIR.STATION) EQ CLOSEST.AS, DO
    FOR EVERY AIR.STATION FROM NUM.MRF(AIR.STATION)
        SUBTRACT 1 FROM NUM.MRF(AIR.STATION)
        ADD 1 TO CASE.CCLAT(AIR.STATION)

    LOOP
    LOOP
    IF TRANS.INF(CAS) NE 1, GO TO 97
    PRINT 4 LINES WITH CAS.NUM(CASE) THUS

    AC AIR STATION IN THIS SYSTEM WAS ABLE TO
    RESPOND TO CASE NUMBER ****, WITH AN HH52A.

'21'  ADD 1 TO HH53.RESPONSE.CASES
    FOR EVERY AIR.STATION STATUS OF THE FOLLOWING
        LET STATUS(AIR.STATION) = 1

    LOOP FOR CAS.
    GO TO CAS.
```

```
::: IS A ... CALL FOR A C-130 TO SERVICE THIS CASE.
::
:57* IF THIS A LINE WITH CASE.NUM(CASE) THUS

    NO AIR STATION IN THE SYSTEM WAS ABLE TO RESPOND TO
    CASE NUMBER ***, WITH A MPRAC.
::
::: IF THESE ARE THIS RVICE CHANGE THE AC.TYPE VALUE, RESET
::: NO STATICS STATUS VALUES AND REWORK THE CASE.
::

C... ***.*** MILES OFFSHORE NOW NEEDS AN HH-52A, IF AVAILABLE.
    IF LCG(CASE) LE 25.0 AND HH.FLAG.EQ.1
    PRINT 2 LINES WITH CASE.NUM(CASE) AND DCS(CASE) THUS

       LET STA .. = H.AIR.STATION
       LET CLC-ST.AS = PRCAE=
       LET AC.TYP.(CASE)=
       FOR EV AIR.STATION, DO THE FOLLOWING
           LET STATUS(ATR.STATION) = 1
       LCCP
       GO TO 2
    ELSE

       LET FLT.KTS=ABS.F((1.4430966-LONG(CASE))*57.29577)*52.0)
       LET KNOTS.UP=ABS.F((0.4872378-LAT(CASE))*57.29577)*60.0)
       LET MILEAGE = (KNOTS.UP**2. + OUT.KTS**2.)**.5
    IF HH.FLAG.EQ.0
       PRINT 2 LINES WITH CASE.NUM(CASE) THUS

HH-52AS ARE ACT IN USE SO A C-130 MUST BE CALLED FOR CASE ***.
       LET R.RESPONC.TIME = MILEAGE/300.)
       ADD TO C130.CALLS

   OTH ...2* THESAS ARE WITH CASE.NUM(CASE) AND DCS(CASE) THUS

             RESPONC.TIME = MILEAGE/300.)

   1/2* 8: LCC ... -D ***.*** MILES OFFSHORE NOW NEEDS A C-130
       LET R.SERVC.TIME = MILEAGE/30).)
       ADD TO C130.CALLS
    IF AC(CASE)=A.HH-52C"

   (A) IF ATLL ALSO (OUTRE IN HH-52A LST A.
       LET TYPE(CASE)=A.C.0 = RESPONC.TIME.1/(150.*4.)
       LET TIME RESPONG.TIME + SPCH.TIME)

       OTHERWISE
       LET TIME = RESPONC.TIME
       ALWAYS
```

73

```
LET AC.TYPE(CASE) = 130
SCHEDULE A LAUNCH GIVEN CASE IN TIME HOURS
OTHERWISE PRINT 1 LINE THUS
TO BE SERVICED COMPLETELY.
GO TO 20
ALWAYS
FOR EVERY AIR.STATION, DO THE FOLLOWING
LET STATUS(AIR.STATION) = 1

LET N.ITEM.TO.PASS GIVEN STATION AND CRAFT

DEFINE STATION AS AN ALPHA VARIABLE
DEFINE CASE AND STATION AS AN INTEGER VARIABLE
FOR EVERY CRAFT, DO THE FOLLOWING
IF CRAFT EQ ..., ADD 1 TO NUM.PER(AIR.STATION)
OTHERWISE ADD 1 TO NUM.H(AIR.STATION)
ALWAYS
IF QUEUE(AIR.STATION) IS NOT EMPTY,
REMOVE THE FIRST CASE FROM A.QUEUE(AIR.STATION)
LET WAIT.TIME(AIR.STATION) = TIME.V - TIME.IN.QUEUE(CASE)
SCHEDULE A LAUNCH GIVEN CASE IN 1.0 HOURS
ALWAYS
LOOP
END

VERY STOP.SIM

DEFINE STATION AS AN INTEGER VARIABLE
DO THE FOLLOWING
FOR EVERY AIR.STATION WITH STATUS(AIR.STATION) ...
COMPUTE ..., CAS. COUNT(AIR.STATION),
LET NR.LAUNCH(AIR.STATION), NO.NR.LAUNCH(AIR.STATION),
LET NR.GRAPH(AIR.STATION), HH.GRAPH(AIR.STATION).2),
LET NR.GRAPH(AIR.STATION).3), IHR.GRAPH(AIR.STATION).4),
LET NR.GRAPH(AIR.STATION).2), MR.GRAPH(AIR.STATION).5),
ADD.WAIT, WAIT.TIME, AVG.WAIT(AIR.STATION).4), AND SD.WAIT.TIME+1440.TIM=1440.
```

74

FOR ... STATION THIS
... CASES ... THE FOLLOWING DATA WAS OBTAINED:
... CASES ... F-4E AND F-4D ...
... TIME ... F-4E WAS UNABLE TO LAUNCH.
... TIME ... F-4D WAS UNABLE TO LAUNCH.
... ARE THE HISTOGRAM VALUES FOR THE F-4E
... ARE THE HISTOGRAM VALUES FOR THE F-4D
... CASES ... OUTPUT WITH A MEAN WAITING TIME IN THE
... OF ...**.** MINUTES. (STD.DEV. OF WAIT TIME = ****.**)

STOP

PRINT ... AVG.RESP.TIME*60*...
... NUM.ANSWERED.CASES, ABORTED.CASES,
C120.CELLS AND RESPONSE TIMES THUS,
... WITH A AVERAGE RESPONSE TIME WAS ****.** MINUTES,
WITH A STANDARD DEVIATION OF ****.** MINUTES,
... CASES ... PRESENTED TO BY THE SYSTEM.
... CASES WAS ABORTED DURING THIS RUN.
... CASES WHERE THE SYSTEM WAS UNABLE TO RESPOND.

FOR HELP ... TO THE FOLLOWING
... PRINT LIST WITH RT.GRAPH(I) THUS
... EACH CASE THAT HAD A RESPONSE TIME GREATER THAN 120 MINUTES.
GO TO ...

PRINT: ... LINE WITH RT.GRAPH(I) AND 3*I THUS
... CASES ... FOR A RESPONSE TIME OF LESS THAN *** MINUTES.

STOP

APPENDIX C

DEFINITION OF THE PROGRAM VARIABLES

A. Global Variables and Attributes Introduced in the Preamble

ABORTED.CASES: Counter used to tally the number of cases
        aborted during the year.

AC.ATT.STATUS: Attribute of each air station which indicates
        what type or types of aircraft are attached. 0 = HH-52A
        only, 1 = HH-65A only, 2 = both types attached.

AC.TYPE: Attribute of each case which indicates what type
        of aircraft will be utilized. 0 = HH-52A,
        1 = HH-65A, 2 = either HH-65A or HH-52A, depending
        on availability and location, 130 = HH-52A, with
        a C-130 acting as escort.

AIR.STATION: Permanent entity, keys storage location for
        each air station in use.

ANSWERED.CASES: Counter used to tally the number of cases
        responded to, with no abort, by the system.

AS.LAT: Attribute of each air station, indicating station
        latitude.

AS.LONG: Attribute of each air station, indicating station
        longitude.

AS.QUEUE: Set associated with each air station, stores the
        cases in that station's queue.

AVG.RESP.TIME: SIMSCRIPT II.5 routine which automatically
        computes the mean of the year's set of response times.

AVG.WAIT.TIME: SIMSCRIPT II.5 routine which automatically
        computes the mean waiting time for all cases assigned
        to a station's queue.

CASE: Temporary entity, stores the attributes for each
        incident until destroyed.

CASE.COUNT: Attribute of each air station, tallies the total
        number of cases responded to by the unit.

CASE.NUM: Attribute of each case, indicating the number of this case for the year.

CLOSEST.AS: Alpha variable which indicates the closest available air station to a case.

C130.CALLS: Counter for the number of C-130 calls in the year.

DIST.FM.AS: Variable which indicates the straight-line distance from an air station to a case.

DIST.TO.CASE: Variable which indicates the distance from an air station to a case, as calculated by the DISTANCE.TO.CASE routine.

DISTANCE.TO.CASE: Function routine which calculates the distance to a case when the aircraft must follow the coastline from its air station.

DOS: Attribute of each case which indicates the distance offshore.

ENIGMA: Event notice for a search case.

HH.ENDUR: Variable indicating total flight time available for a HH-52A.

HH.FLAG: Variable used to indicate if HH-52As are in use, 0 = No, 1 = Yes.

HH.GRAPH: SIMSCRIPT II.5 routine used to calculate a histogram for each air station of the amount of time the station has 0, 1, 2 or 3 HH-52As not engaged in SAR operations.

HH.RANGE: Variable indicating the maximum radius of flight for a HH-52A without refueling. Maximum distance the craft can fly away from land and be able to return safely.

HH.SPEED: Variable used to indicate the speed of advance for a HH-52A.

LAT: Attribute of each case, indicating its latitude.

LAUNCH: Event notice for a launch.

LNG.MULT: Attribute for each air station, used to convert
            degrees of longitude into nautical miles. A variable
            is used to account for the change in the length of
            degree of longitude as one moves northward.

LONG: Attribute of each case, indicating its longitude.

MR.FLAG: Same as HH.FLAG, used for HH-65As.

MR.GRAPH: Same as HH.GRAPH, used for HH-65As.

MRR.ENDUR: Same as HH.ENDUR, used for HH-65As.

MRR.RANGE: Same as HH.RANGE, used for HH-65As.

MRR.SPEED: Same as HH.SPEED, used for HH-65As.

NAME: Attribute for each air station, alphabetic name of
        the station.

NDOS: Attribute of each event NOSRCH indicating its distance
        offshore.

NLAT: Attribute of each event NOSRCH indicating its latitude.

NLONG: Attribute of each event NOSRCH indicating its longitude.

NNOM1, NNOM2 and NNOM3:   Attributes of each event NOSRCH
            indicating the names of the demands of the event.

NO.HH.LAUNCH: Attribute for each air station, used as a
            counter for the total number of times the station
            was unable to launch a HH-52A.

NO.MR.LAUNCH: Same as NO.HH.LAUNCH, used for HH-65As.

NO.RESPONCE.CASES: Counter used to tally the number of
            cases for which the system was unable to respond to
            with a helicopter.

NOM1, NOM2 and NOM3:   Attributes of each case, used to
            indicate the names of the demands placed upon the
            system by the case.

NOSRCH: Event notice for a non-search case.

NSEAS: Attribute for each event NOSRCH, indicating the sea
         state.

NSER1, NSER2 and NSER3: Attributes for each event NOSRCH,
            Indicating the service times for the demands of the
            event.

NSEV: Attribute for each event NOSRCH, indicating its
            severity.

NUM.HH: Attribute for each air station indicating the number
            of HH-52As available at any time for SAR operations.

NUM.MRR: Same as NUM.HH, used for HH-65As.

NUM.WHO.WAITED: Attribute for each air station which tallies
            the total number of cases which were queued.

NVIS: Attribute for each event NOSRCH, indicating the
            visibility on scene.

NWINDS: Attribute for each event NOSRCH, indicating the wind
            velocity on scene.

RESPONCE.TIME: Variable which measures the amount of time
            between launch and arrival on scene or at the search
            location.

RETURN.TO.BASE: Event notice for a return to its base by
            an aircraft.

RETURNING.TYPE: Attribute for each event RETURN.TO.BASE
            which indicates what type of helicopter is returning.

RT.GRAPH: SIMSCRIPT II-5 routine used to calculate a
            histogram of the set of response times generated
            for each year's run.

SD.RESP.TIME: Same as AVG.RESP.TIME except that the
            standard deviation is calculated.

SD.WAIT.TIME: Same as AVG.WAIT.TIME except that the standard
            deviation is calculated.

SDOS: Same as NODS, for the event ENIGMA.

SEAS: Attribute of each case, indicating the sea state.

SEED: Variable used to indicate the random number generator
            seed in use.

SER.1, SER.2 and SER.3: Attributes for each case, indicating
            the service times for the case demands.

SEV: Attribute for each case, indicating its severity.
       0 = Some danger that personnel or property might
           be lost.
       1 = Personnel or property were in grave danger of
           loss or were lost.

SNOM1, SNOM2 and SNOM3:   Same as NNOM1, etc., for the event
       ENIGMA.

SORTIE: Variable used to facilitate the passing of case
       information from one routine to another.

SR.LAT: Same as NLAT, for the event ENIGMA.

SR.LNG: Same as NLONG, for the event ENIGMA.

SSER.1, SSER.2 and SSER.3:   Same as NSER.1, etc., for the
       event ENIGMA.

SSEV: SAME AS NSEV, for the event ENIGMA.

STATION: Attribute for each event RETURN.TO.BASE which
       indicates which air station the returning helicopter
       is assigned to.

STATUS: Attribute for each air station, used to facilitate
       the search for the closest available air station.

STOP.SIM: Event notice for the end of the year/run.

STSEM: Attribute for each event ENIGMA, indicating the total
       search miles for the event.

SVIS: Same as NVIS, for the event ENIGMA.

SWINDS: Same as NWINDS, for the event ENIGMA.

TIME.IN.QUEUE: Attribute for each case, indicating the time
       that the case enter an air station's queue.

TSEM: Attribute for each case, indicating the total search
       miles for the case.

TYPE: Attribute for each case, indicating whether the case
       is a non-search (TYPE = 1) or search (TYPE = 0) case.

VAR.RESP.TIME: Same as AVG.RESP.TIME except that the variance
       is calculated.

VAR.WAIT.TIME: Same as AVG.WAIT.TIME except that the variance
       is calculated.

VIS: Attribute for each case, indicating the visibility for the case.

WAIT.TIME: Attribute for each air station; it measures the amount of time a case has spent in the air station's queue.

WINDS: Attribute for each case, indicating the wind velocity.

X.NUM: Variable used to number all of the cases as they arrive.

B. Variables Introduced in the Routine MAIN

N.AIR.STATION: The number of air stations which will be utilized during a particular run.

C. Variables Introduced in the Routine DISTANCE.TO.CASE

ABS.F: SIMSCRIPT II.5 library routine which takes the absolute value of a number.

CUTOFF: Variable name for the latitude of the point where the coastline turns to the right as depicted in Fig. IV-1.

KNOTS.UP: Variable used to record part or all of the distance, in knots, of a leg of the total flight path.

OUT.KTS: Same as KNOTS.UP.

UP.MILES: Same as KNOTS.UP.

D. Variables Introduced in the ENIGMA Routine

HRS.OUT: Variable used to record the time that it takes a C-130 to arrive on scene.

KNTS.UP: Variable used to record the vertical distance from Air Station Clearwater to a case.

MILEAGE: Variable used to record the straight-line distance from Air Station Clearwater to a case.

OUT.KNTS: Variable used to record the horizontal distance from Air Station Clearwater to a case.

SRCH.HRS: Variable used to record the number of hours the C-130 will take searching on a case.

81

TOT.HRS: HRS.OUT + SRCH.HRS, total time elapsed until a
helicopter is needed.

E. Variables Introduced in the NOSRCH Routine

All local variables utilized in this routine are identical
to those used in the ENIGMA routine. TOT.HRS for this routine
is the same as HRS.OUT since no searching is involved.

F. Variables Introduced in the LAUNCH Routine

KNOTS.UP: Variable used to record the vertical distance
from an air station to a case.

MILEAGE: Variable used to record the straight-line distance
from an air station to a case.

OUT.KTS: Variable used to record the horizontal distance
from an air station to a case.

PROB.AC.OR: Variable used to record the probability
extracted from UNIFORM.F distribution, using the
supplied SEED. This variable was then used to
determine if an aircraft at the closest available
air station was available for SAR operations.

REFUEL: Variable used to record the total number of hours
used for refueling, while on a case.

SRCH.TIME: Variable used to record the time that a C-130
will spend searching on a case that a HH-65A was unable
to respond on, when HH-52As were also available.

STAR: Variable used to facilitate the search for the
closest available air station. It its value gets
to zero, then the program realizes that it's run
out of possible available air stations.

TIME: Variable used to record the total time spent by a
helicopter servicing the demands of a case.

TRANSIT.TIME: Variable used to record the time that it
takes for a HH-52A to arrive on scene to assist a
C-130 in the servicing of a case.

TRUNC.F: SIMSCRIPT II.5 library routine which truncates
an expression or variable leaving only the integer
portion.

UNIFORM.F(X,Y,Z): SIMSCRIPT II.5 library routine which
          generates a random variable which is distributed
          uniformly between X and Y, utilizing a seed Z.
          Z = SEED in this model.

G. Variables Introduced in the RETURN.TO.BASE Routine

CRAFT: Is equivalent to the global variable RETURNING.TYPE.

TIME.V: A SIMSCRIPT II.5 global variable which is always
          equal to the time at which the simulation is at
          when it is used. Therefore, in this instance, it
          will always be equal to the time the aircraft
          returned to base.

APPENDIX D

COMPLETE SIMULATION DATA FOR THE
3 HH-52A, 1 LOCATION SCENARIO

<u>Charleston:</u> Year 1 (139 cases)

ART:	74.88	74.58	74.68
SDRT:	62.36	61.93	62.16
Cases:	124	126	125
Cases NOR:	2	0	1
% of time with 3 HH:	93.8	93.7	93.7
% of time with 2 HH:	5.9	6.0	6.0
% of time with 1 HH:	0.2	0.2	0.2
% of time with 0 HH:	0.0	0.0	0.0

C-130 calls: 16

% of cases with RT less than 45 minutes: 26.2

% of cases with RT greater than 120 minutes: 17.7

0 cases were queued.

Charleston: Year 2 (141 cases)

ART:	69.99	69.31	69.42
SDRT:	48.05	47.74	47.91
Cases:	126	129	129
Cases NOR:	4	1	2
% of time with 3 HH:	93.6	93.6	93.7
% of time with 2 HH:	6.0	5.9	5.9
% of time with 1 HH:	.3	.4	.4
% of time with 0 HH:	.1	.1	.0

C-130 calls: 15

% of cases with RT less than 45 minutes: 18.2

% of cases with RT greater than 120 minutes: 11.4

0 cases were queued.

Charleston: Year 3 (163 cases)

ART:	78.45	80.23	78.04
SDRT:	65.31	66.92	65.01
Cases:	152	152	154
Cases NOR:	4	4	2
% of time with 3 HH:	92.3	92.2	92.2
% of time with 2 HH:	7.1	7.1	7.2
% of time with 1 HH:	.5	.5	.4
% of time with 0 HH:	0	.1	.1

C-130 calls: 13

% of cases with RT less than 45 minutes: 23.6

% of cases with RT greater than 120 minutes: 19.6

Qued Cases:	1	2	2
Average queue time: 66.54	73.25	75.25

Charleston: Year 4 (167 cases)

ART:	70.39	71.83	71.22
SDRT:	58.33	59.27	58.91
Cases:	149	147	150
Cases NOR:	3	5	2
% of time with 3 HH:	93.1	93.2	93.1
% of time with 2 HH:	6.1	6.0	6.1
% of time with 1 HH:	.6	.6	.7
% of time with 0 HH:	.1	.1	.1

C-130 calls: 25

% of cases with RT less than 45 minutes: 27.1

% of cases with RT greater than 120 minutes: 15.5

0 cases were queued.

Charleston: Year 5 (162 cases)

ART:	79.84	80.42	79.61
SDRT:	64.36	64.53	64.72
Cases:	152	151	150
Cases NOR:	1	2	3
% of time with 3 HH:	92.2	92.2	92.3
% of time with 2 HH:	7.1	7.1	7.2
% of time with 1 HH:	.5	.5	.4
% of time with 0 HH:	.1	.1	.1

C-130 calls: 13

% of cases with RT less than 45 minutes: 22.2

% of cases with RT greater than 120 minutes: 19.4

0 cases were queued.

Charleston: Year 6   (157 cases)

ART:	74.26	74.18	74.19
SDRT:	57.62	57.43	57.43
Cases:	145	146	146
Cases NOR:	2	1	1
% of time with 3 HH:	92.7	92.6	92.7
% of time with 2 HH:	6.6	6.7	6.6
% of time with 1 HH:	.6	.6	.7
% of time with 0 HH:	0	0	0

C-130 calls: 13

% of cases with RT less than 45 minutes: 25.3

% of cases with RT greater than 120 minutes: 15.7

0 cases were queued.

Charleston: Year 7 (178 cases)

ART:	79.59	80.07	79.89
SDRT:	67.52	67.78	67.90
Cases:	165	165	166
Cases NOR:	2	2	1
% of time with 3 HH:	91.5	91.5	91.5
% of time with 2 HH:	7.4	7.4	7.4
% of time with 1 HH:	.9	.9	.9
% of time with 0 HH:	.1	.1	.1

C-130 calls: 20

% of cases with RT less than 45 minutes: 27.1

% of cases with RT greater than 120 minutes: 19.5

0 cases were queued.

<u>Mayport</u>: Year 1

ART:	66.19	66.21	66.12
SDRT:	21.83	21.74	21.68
Cases:	124	125	126
Cases NOR:	2	1	0
% of time with 3 HH:	94.3	94.3	94.2
% of time with 2 HH:	5.4	5.4	5.5
% of time with 1 HH:	.2	.2	.2
% of time with 0 HH:	.1	.1	.1

C-130 calls: 16

% of cases with RT less than 45 minutes: 12.4

% of cases with RT greater than 120 minutes: 0.7

0 cases were queued.

Mayport: Year 2

ART:	60.39	60.38	60.42
SDRT:	22.19	22.10	22.24
Cases:	129	130	128
Cases NOR:	1	1	2
% of time with 3 HH:	93.8	93.7	93.9
% of time with 2 HH:	5.9	5.9	5.9
% of time with 1 HH:	0.2	0.2	0.2
% of time with 0 HH:	0.1	0.1	0.0

C-130 calls: 15

% of cases with RT less than 45 minutes: 19.8

% of cases with RT greater than 120 minutes: 0.7

0 cases were queued.

Mayport: Year 3

ART:	66.99	66.67	67.02
SDRT:	22.46	22.13	22.35
Cases:	154	151	152
Cases NOR:	2	5	4
% of time with 3 HH:	92.8	92.9	92.9
% of time with 2 HH:	6.5	6.4	6.5
% of time with 1 HH:	0.5	0.5	0.5
% of time with 0 HH:	0.2	0.2	0.1

C-130 calls: 13

% of cases with RT less than 45 minutes: 12.9

% of cases with RT greater than 120 minutes: 0.7

3 cases were queued with an average
waiting time in the queue of 43.36 minutes.

Mayport: Year 4

ART:	65.56	65.62	65.63
SDRT:	21.30	21.43	21.43
Cases:	152	150	150
Cases NOR:	0	2	2
% of time with 3 HH:	93.4	93.4	93.5
% of time with 2 HH:	5.9	5.9	5.8
% of time with 1 HH:	0.6	0.6	0.6
% of time with 0 HH:	0.1	0.0	0.1

C-130 calls: 25

% of cases with RT less than 45 minutes: 13.1

% of cases with RT greater than 120 minutes: 0.6

0 cases were queued.

Mayport: Year 5

ART:	64.45	64.39	64.67
SDRT:	23.67	23.76	23.47
Cases:	151	150	152
Cases NOR:	2	3	1
% of time with 3 HH:	92.9	93.0	92.9
% of time with 2 HH:	6.5	6.4	6.5
% of time with 1 HH:	0.4	0.4	0.4
% of time with 0 HH:	0.1	0.1	0.1

C-130 calls: 13

% of cases with RT less than 45 minutes: 16.5

% of cases with RT greater than 120 minutes: 1.3

0 cases were queued.

Mayport: Year 6

ART:	63.85	64.03	64.09
SDRT:	22.38	22.46	22.52
Cases:	146	146	145
Cases NOR:	1	1	2
% of time with 3 HH:	93.4	93.3	93.4
% of time with 2 HH:	5.9	6.0	5.9
% of time with 1 HH:	0.5	0.5	0.5
% of time with 0 HH:	0.1	0.1	0.1

C-130 calls: 13

% of cases with RT less than 45 minutes: 16.4

% of cases with RT greater than 120 minutes: 0.0

0 cases were queued.

Mayport: Year 7

ART:	65.91	66.13	65.65
SDRT:	25.90	26.15	25.38
Cases:	165	165	165
Cases NOR:	2	2	2
% of time with 3 HH:	92.2	92.3	92.3
% of time with 2 HH:	6.8	6.7	6.8
% of time with 1 HH:	0.8	0.8	0.7
% of time with 0 HH:	0.1	0.1	0.2

C-130 calls: 20

% of cases with RT less than 45 minutes: 16.2

% of cases with RT greater than 120 minutes: 1.3

0 cases were queued.

97

Savannah: Year 1

ART:	48.38	49.45	50.01
SDRT:	45.48	45.99	46.12
Cases:	127	129	127
Cases NOR:	2	0	2
% of time with 3 HH:	95.0	94.8	94.9
% of time with 2 HH:	4.6	4.7	4.7
% of time with 1 HH:	0.2	0.2	0.2
% of time with 0 HH:	0.1	0.2	0.1

C-130 calls: 16

% of cases with RT less than 45 minutes: 59.1

% of cases with RT greater than 120 minutes: 12.1

1 case was queued with a waiting time
in that queue of 472.89 minutes.

Savannah: Year 2

ART:	39.21	39.00	38.60
SDRT:	37.63	37.57	37.13
Cases:	129	130	128
Cases NOR:	1	0	2
% of time with 3 HH:	94.8	94.8	94.9
% of time with 2 HH:	4.9	4.9	4.8
% of time with 1 HH:	0.2	0.2	0.1
% of time with 0 HH:	0.0	0.0	0.1

C-130 calls: 15

% of cases with RT less than 45 minutes: 68.2

% of cases with RT greater than 120 minutes: 6.8

0 cases were queued.

<u>Savannah</u>: Year 3

ART:	47.30	48.27	47.40
SDRT:	47.46	48.67	47.61
Cases:	154	152	153
Cases NOR:	2	4	3
% of time with 3 HH:	93.6	93.6	93.6
% of time with 2 HH:	6.0	5.9	5.9
% of time with 1 HH:	0.2	0.3	0.3
% of time with 0 HH:	0.1	0.1	0.1

C-130 calls: 13

% of cases with RT less than 45 minutes: 64.6

% of cases with RT greater than 120 minutes: 13.3

0 cases were queued.

Savannah: Year 4

ART:	45.64	45.68	45.05
SDRT:	44.88	44.94	44.34
Cases:	152	151	150
Cases NOR:	0	1	2
% of time with 3 HH:	94.4	94.4	94.4
% of time with 2 HH:	5.0	5.0	5.1
% of time with 1 HH:	0.5	0.5	0.4
% of time with 0 HH:	0.1	0.1	0.1

C-130 calls: 25

% of cases with RT less than 45 minutes: 61.4

% of cases with RT greater than 120 minutes: 11.4

0 cases were queued.

Savannah: Year 5

ART:	47.24	46.44	47.01
SDRT:	48.46	48.28	48.38
Cases:	150	152	151
Cases NOR:	3	1	2
% of time with 3 HH:	93.8	93.7	93.7
% of time with 2 HH:	5.7	5.8	5.8
% of time with 1 HH:	0.3	0.3	0.4
% of time with 0 HH:	0.1	0.1	0.1

C-130 calls: 13

% of cases with RT less than 45 minutes: 63.1

% of cases with RT greater than 120 minutes: 14.1

0 cases were queued.

Savannah: Year 6

ART:	41.87	42.08	42.06
SDRT:	42.90	42.97	42.98
Cases:	147	146	146
Cases NOR:	0	1	1
% of time with 3 HH:	94.2	94.2	94.2
% of time with 2 HH:	5.4	5.3	5.4
% of time with 1 HH:	0.4	0.4	0.4
% of time with 0 HH:	0.0	0.0	0.0

C-130 calls: 13

% of cases with RT less than 45 minutes: 67.5

% of cases with RT greater than 120 minutes: 9.3

0 cases were queued.

Savannah: Year 7

ART:	50.87	50.32	49.93
SDRT:	48.99	49.01	48.81
Cases:	165	165	165
Cases NOR;	2	2	2
% of time with 3 HH:	93.0	93.0	93.0
% of time with 2 HH:	6.1	6.2	6.2
% of time with 1 HH:	0.7	0.7	0.7
% of time with 0 HH:	0.1	0.1	0.1

C-130 calls: 20

% of cases with RT less than 45 minutes: 60.5

% of cases with RT greater than 120 minutes: 14.2

0 cases were queued.

NOTE: As seen with the previous runs, with locations in SAVANNAH, MAYPORT and CHARLESTON, changing SEED did not affect the outcome to any large degree so this was not done for the BRUNSWICK runs.

Brunswick:	Year 1	Year 2	Year 3	Year 4	Year 5	Year 6	Year 7
ART:	52.60	43.55	52.27	51.64	50.85	48.60	54.33
SDRT:	28.41	25.34	30.33	27.03	30.35	27.09	30.44
Cases:	124	130	154	150	150	146	166
Cases NOR:	2	0	2	2	3	1	1
% of time with 3 HH:	94.9	94.5	93.4	94.1	93.7	94.0	92.9
% of time with 2 HH:	4.8	5.2	6.1	5.3	5.8	5.4	6.2
% of time with 1 HH:	0.1	0.1	0.3	0.6	0.4	0.4	0.7
% of time with 0 HH:	0.0	0.1	0.1	0.0	0.1	0.1	0.1
C-130 calls:	16	15	13	25	13	13	20
% cases w/RT < 45:	48.8	64.1	51.0	45.4	54.8	53.8	48.1
% cases w/RT > 120:	3.1	1.5	6.2	2.6	5.5	4.1	5.6
Cases qued:	0	0	0	0	0	0	0

APPENDIX E

Complete Simulation Data for the 3 HH-52A, 2 Located in
Savannah and 1 Located in Other Locations Scenario

Savannah (2 HH-52As), Brunswick (1 HH-52A):

	Year 1	Year 2	Year 3	Year 4	Year 5	Year 6	Year 7
ART:	40.28	31.23	40.52	39.71	38.47	34.27	41.68
SDRT:	35.25	29.84	38.54	34.32	38.58	34.67	37.26
Cases:	88/37	92/35	107/45	116/34	109/43	107/37	120/45
Cases NOR:	5/9	6/14	8/13	5/13	4/13	4/13	6/14
% of time Sav has 2 HH-52As:	97.4	96.7	96.2	96.2	96.2	96.5	95.7
% of time SAV has 1 HH-52A:	2.5	3.2	3.6	3.7	3.6	3.4	4.2
% of time Sav has 0 HH-52As:	0.1	0.1	0.2	0.1	0.2	0.1	0.1
% of time Bru has 1 HH-52A:	97.9	98.4	97.6	98.2	97.8	97.9	97.2
% of time Bru has 0 HH-52As:	2.1	1.6	2.4	1.8	2.2	2.0	2.8
C-130 calls:	16	15	13	25	13	13	20
% of cases w/RT < 45:	60.1	74.6	66.6	62.2	68.9	73.6	63.0
% of cases w/RT > 120:	4.7	3.8	9.5	4.5	6.7	6.1	8.6
Cases Qued Sav:	0	1/149.11	3/127 93	1/29.66	1/40.14		1/98.85
Cases Qued Bru:			2/135.96	2/45.12	3/200.83	1/249.54	1/62.2
No response:	1	3	4	2	1	3	2

Savannah (2 HH-52As), Mayport (1 HH-52)

	Year 1	Year 2	Year 3	Year 4	Year 5	Year 6	Year 7
ART:	39.54	31.23	37.58	37.08	35.28	33.11	39.30
SDRT:	33.45	25.62	30.85	27.30	30.93	31.17	32.61
Cases:	95/29	99/29	116/37	118/32	110/42	114/29	123/42
Cases NOR:	6/9	6/8	8/9	7/8	5/10	6/12	7/12
% of time Sav has 2 HH-52As:	97.2	96.6	95.9	96.4	96.5	96.3	95.6
% of time Sav has 1 HH-52A:	2.7	3.3	3.9	3.5	3.3	3.6	4.3
% of time Sav has 0 HH-52As:	0.1	0.1	0.2	0.1	0.2	0.1	0.1
% of time May has 1 HH-52A:	98.2	98.5	98.1	98.1	97.7	98.4	97.6
% of time May has 0 HH-52As:	1.8	1.5	1.9	1.9	2.3	1.6	2.4
C-130 calls:	16	15	13	25	13	13	20
% of cases w/RT < 45:	62.5	73.3	67.6	61.5	70.1	76.2	64.2
% of cases w/RT > 120:	4.7	1.5	2.0	1.3	2.7	3.4	3.7
Cases Qued Sav:	0	0	5/50.64	1/29.66	4/144.54	0	1/98.85
Cases Qued May:	0	0	1/161.88	1/1.51		1/194.88	1/7.54
No response:	2	2	3	2	1	4	2

Savannah (2 HH-52As), Daytona (1 HH-52A)

	Year 1	Year 2	Year 3	Year 4	Year 5	Year 6	Year 7
ART:	36.09	31.66	33.80	33.80	32.40	32.18	38.35
SDRT:	34.11	27.96	31.01	27.93	31.76	30.19	32.64
Cases:	99/25	104/25	117/35	120/30	120/32	119/25	127/38
Cases NOR:	6/9	7/6	10/8	8/6	4/10	6/9	9/10
% of time Sav has 2 HH-52As:	96.8	96.4	95.8	96.3	95.9	95.8	95.4
% of time Sav has 1 HH-52A:	3.1	3.5	3.9	3.6	3.9	4.0	4.5
% of time Sav has 0 HH-52As:	0.1	0.1	0.2	0.1	0.2	0.1	0.1
% of time Day has 1 HH-52A:	98.7	98.8	98.4	98.5	98.5	98.8	97.9
% of time Day has 0 HH-52As:	1.3	1.2	1.6	1.5	1.5	1.2	2.1
C-130 calls:	16	15	13	25	13	13	20
% of cases w/RT < 45:	69.5	73.3	74.0	68.6	74.1	75.7	66.0
% of cases w/RT > 120:	5.4	1.5	2.7	2.6	3.4	4.1	4.9
Cases Qued Sav:	0	0	4/138.48	1/29.66	0	0	1/98.85
Cases Qued Day:	0	0	1/259.22	0	2/225.88	1/97.54	0
No response:	2	1	4	2	1	3	2

APPENDIX F

Complete Simulation Data for the 2 HH-52A/1 HH-65A,
1 Location Scenario (Savannah)

	Year 1	Year 2	Year 3	Year 4	Year 5	Year 6	Year 7
ART:	55.07	37.27	49.93	53.83	56.24	42.23	69.77
SDRT:	91.24	38.03	52.08	87.32	89.89	45.13	130.41
Cases:	124	125	142	150	141	139	157
Cases NOR:	0/7	1/9	0/12	0/14	0/8	0/15	0/11
% of time Sav has 2 HH-52As:	95.2	95.3	94.1	94.9	94.2	94.7	93.7
% of time Sav has 1 HH-52A:	4.7	4.5	5.6	4.7	5.5	5.2	5.7
% of time Sav has 0 HH-52As:	0.1	0.2	0.3	0.4	0.3	0.1	0.6
% of time Sav has 1 HH-65A:	99.6	99.4	99.2	99.0	99.4	99.4	98.9
% of time Sav has 0 HH-65As:	0.4	0.6	0.8	1.0	0.6	0.6	1.1
C-130 calls:	2	2	3	6	1	3	1
% of cases w/RT < 45:	64.5	74.4	66.9	64.7	63.1	69.8	60.5
% of cases w/RT > 120:	14.5	6.4	16.2	14.6	16.3	10.1	17.8
Cases Qued:	0	1/32.8	1/92.17	0	0	0	0
No response:	5	7	9	8	7	12	10

APPENDIX G

Complete Simulation Data for the 2 HH-52A/1 HH-65A System,
2 Located in Savannah and the HH-65A Located in Other Locations

Savannah (2 HH-52As), Mayport (1 HH-65A)

	Year 1	Year 2	Year 3	Year 4	Year 5	Year 6	Year 7
ART:	41.31	29.31	35.24	39.39	37.92	28.26	54.77
SDRT:	81.89	21.79	34.02	75.58	78.06	24.80	124.43
Cases:	92/42	95/42	112/49	114/49	104/55	113/43	116/53
Cases NOR:	0/7	1/9	0/11	0/11	0/7	0/8	1/15
% of time Sav has 2 HH-52As:	97.0	96.6	96.2	96.4	96.7	96.5	95.6
% of time Sav has 1 HH-52A:	2.9	3.3	3.7	3.4	3.2	3.4	4.3
% of time Sav has 0 HH-52As:	0.1	0.1	0.1	0.2	0.1	0.1	0.1
% of time May has 1 HH-52A:	98.4	98.3	97.5	97.4	97.4	97.9	97.3
% of time May has 0 HH-52As:	1.6	1.7	2.5	2.6	2.6	2.1	2.7
C-130 calls:	2	3	1	5	0	2	4
% of cases w/RT < 45:	66.6	77.1	76.6	70.3	70.3	78.6	69.3
% of cases w/RT > 120:	2.3	0.8	3.3	3.2	2.0	2.0	7.3
Cases Qued Sav:	0	0	1/95.46	0	0	0	0
Cases Qued May:	0	0	5/191.10	1/20.44	2/169.93	1/87.95	2/126.41
No response:	0	1	0	0	0	0	2

Savannah (2 HH-52As), Brunswick (1 HH-65A)

	Year 1	Year 2	Year 3	Year 4	Year 5	Year 6	Year 7
ART:	41.48	27.08	35.06	39.02	39.28	30.43	55.59
SDRT:	83.82	23.72	34.15	76.61	79.30	29.89	125.06
Cases:	88/48	85/52	103/57	106/57	98/60	103/53	110/59
Cases NOR:	0.8	1/10	1/13	0/11	0/11	0/10	1/15
% of time Sav has 2 HH-52As:	97.4	97.0	96.7	96.6	97.0	96.6	95.7
% of time Sav has 1 HH-52A:	2.5	2.9	3.2	3.2	2.7	3.2	4.2
% of time Sav has 0 HH-52As:	0.1	0.1	0.1	0.2	0.3	0.2	0.1
% of time Bru has 1 HH-65A:	97.9	97.9	.97.1	97.3	97.1	97.6	97.1
% of time Bru has 0 HH-65As:	2.1	2.1	2.9	2.7	2.9	2.4	2.9
C-130 calls:	0	3	2	5	2	1	4
% of cases w/RT < 45:	67.4	77.1	72.5	69.6	69.6	79.3	65.1
% of cases w/RT > 120:	4.6	0.7	3.4	3.2	2.7	2.6	7.4
Cases Qued Sav:	0	0	1/95.46	0	1/217.06	0	0
Cases Qued Bru:	1/30.7	0	0	0	1/220.98	1/123.09	2/155.17
No response:	0	1	1	0	0	0	2

Savannah (2 HH-52As), Daytona Beach (1 HH-65A)

	Year 1	Year 2	Year 3	Year 4	Year 5	Year 6	Year 7
ART:	40.69	33.42	41.07	37.42	36.63	30.65	53.94
SDRT:	82.24	27.53	76.52	40.74	77.81	27.30	124.00
Cases:	94/40	102/36	117/46	119/42	111/48	122/34	124/45
Cases NOR:	0/3	0/4	0/10	0/7	0/6	0/8	1/15
% of time Sav has 2 HH-52As:	96.9	96.3	96.3	95.8	96.5	96.1	95.2
% of time Sav has 1 HH-52A:	3.0	3.5	3.5	3.9	3.3	3.8	4.6
% of time Sav has 0 HH-52As:	0.1	0.1	0.2	0.2	0.2	0.1	0.2
% of time Day has 1 HH-52A:	98.5	98.3	97.5	97.8	97.6	98.2	97.7
% of time Day has 0 HH-52As:	1.5	1.7	2.5	2.2	2.4	1.8	2.3
C-130 calls:	2	3	5	1	0	2	4
% of cases w/RT < 45:	73.6	74.2	70.3	76.6	77.0	80.7	73.0
% of cases w/RT > 120:	2.3	2.3	2.5	4.6	2.0	1.3	6.1
Cases Qued Sav:	0	0	0	3/97.69	0	0	0
Cases Qued Day:	0	0	1/73.88	3/139.09	2/131.29	1/27.36	2/105.95
No response:	0	0	0	0	0	0	2

112

LIST OF REFERENCES

1. Conway, Hobart M., Jr., The Weather Handbook. Atlanta: Conway Publications, Inc., 1963.

2. Hollemon, K. C., An Analysis of the Need for a Coast Guard Search and Rescue Facility, Master's Thesis, Naval Postgraduate School, Monterey, 1975.

3. Kiviat, P. J., Villanueva, R., and Markowitz, H. M., SIMSCRIPT II.5 Programming Language. Arlington, Virginia: Consolidated Analysis Centers, Inc., 1973.

4. Maisel, Herbert and Gnugnoli, G., Simulation of Discrete Stochastic Systems. Chicago: Science Research Associates, Inc., 1972.

5. National Bureau of Standards Report 10430. A Search and Rescue Simulation Model for the United States Coast Guard. Washington, D. C.

6. Ruffner, James A. and Bair, Frank E., The Weather Almanac, Detroit: Gale Research Co., 2nd edition, 1977.

7. Smith, John, Computer Simulation Models. New York: Hafner Publishing Company, 1968.

8. United States Coast Guard. Search and Rescue Data System Manual (CG-523). Washington, 1978.

9. United States Coast Guard. Programmer Level Documentation for the Simulate Response Member of SARSIM. Groton, Connecticut: USCG Research and Development Center, 1979.

10. United States Coast Guard. Aviation Plan, FY 1981-1990 (COMDTINST M16000.2). Washington, 1979.

11. United States Coast Guard. FY 1982-1991 Operating Program Plan for the Search and Rescue Program, Washington, 1979.

12. United States Coast Guard. Analyst Level Documentation for the Search and Rescue Simulation (SARSIM). Groton, Connecticut: USCG Research and Development Center, 1979.

13. United States Coast Guard. Programmer Level
     Documentation for the TRANZ Program of SARSIM.
     Groton, Connecticut: USCG Research and
     Development Center, 1978.

14. United States Coast Guard. Programmer Level Documentation
     for the Data Preparation Member of SARSIM. Groton,
     Connecticut: USCG Research and Development Center,
     1978.

15. United States Coast Guard. Programmer Level Documenta-
     tion for the Originate Events Member of SARSIM.
     Groton, Connecticut: USCG Research and Development
     Center, 1979.

16. Wyman, Forrest Paul, Simulation Modeling: A Guide to
     Using SIMSCRIPT. New York: John Wiley and Sons,
     1970.

114

INITIAL DISTRIBUTION LIST

No. Copies

1. Defense Technical Information Center   2
    Cameron Station
    Alexandria, Virginia 22314

2. Library, Code 0142   2
    Naval Postgraduate School
    Monterey, California 93940

3. Department Chairman, Code 30   3
    Department of Operations Research
      and Systems Analysis
    Naval Postgraduate School
    Monterey, California 93940

4. Lieutenant E. F. Roland, USN, Code 55 Ro   1
    Department of Operations Research
      and Systems Analysis
    Naval Postgraduate School
    Monterey, California 93940

5. Assoc. Professor G. G. Brown, Code 55 Br   1
    Department of Operations REsearch
      and Systems Analysis
    Naval Postgraduate School
    Monterey, California 93940

6. Commandant (G-PTE-1/72)   2
    United States Coast Guard
    Washington, D.C. 20590

7. LCDR K. C. Hollemon, USCG   2
    Commandant (G-OSR-2/72)
    United States Coast Guard
    Washington, D.C. 20590

8. LT Charles Taylor Lancaster, USCG   2
    4303 Towanda Road
    Chesapeake, Virginia 23325